

United  
States  
of  
America



*To Promote the Progress*



*of Science and Useful Arts*

*The Director*

*of the United States Patent and Trademark Office has received an application for a patent for a new and useful invention. The title and description of the invention are enclosed. The requirements of law have been complied with, and it has been determined that a patent on the invention shall be granted under the law.*

*Therefore, this United States*

*Patent*

grants to the person(s) having title to this patent the right to exclude others from making, using, offering for sale, or selling the invention throughout the United States of America or importing the invention into the United States of America, and if the invention is a process, of the right to exclude others from using, offering for sale or selling throughout the United States of America, products made by that process, for the term set forth in 35 U.S.C. 154(a)(2) or (c)(1), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b). See the Maintenance Fee Notice on the inside of the cover.

*Cole Morgan Smead*

ACTING DIRECTOR OF THE UNITED STATES PATENT AND TRADEMARK OFFICE

## Maintenance Fee Notice

If the application for this patent was filed on or after December 12, 1980, maintenance fees are due three years and six months, seven years and six months, and eleven years and six months after the date of this grant, or within a grace period of six months thereafter upon payment of a surcharge as provided by law. The amount, number and timing of the maintenance fees required may be changed by law or regulation. Unless payment of the applicable maintenance fee is received in the United States Patent and Trademark Office on or before the date the fee is due or within a grace period of six months thereafter, the patent will expire as of the end of such grace period.

## Patent Term Notice

If the application for this patent was filed on or after June 8, 1995, the term of this patent begins on the date on which this patent issues and ends twenty years from the filing date of the application or, if the application contains a specific reference to an earlier filed application or applications under 35 U.S.C. 120, 121, 365(c), or 386(c), twenty years from the filing date of the earliest such application (“the twenty-year term”), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b), and any extension as provided by 35 U.S.C. 154(b) or 156 or any disclaimer under 35 U.S.C. 253.

If this application was filed prior to June 8, 1995, the term of this patent begins on the date on which this patent issues and ends on the later of seventeen years from the date of the grant of this patent or the twenty-year term set forth above for patents resulting from applications filed on or after June 8, 1995, subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b) and any extension as provided by 35 U.S.C. 156 or any disclaimer under 35 U.S.C. 253.



US012217881B2

(12) **United States Patent**  
**Singh**

(10) **Patent No.:** **US 12,217,881 B2**

(45) **Date of Patent:** **\*Feb. 4, 2025**

(54) **STORAGE AND TRANSPORT CASK FOR NUCLEAR WASTE**

(71) Applicant: **HOLTEC INTERNATIONAL**,  
Camden, NJ (US)

(72) Inventor: **Krishna P. Singh**, Jupiter, FL (US)

(73) Assignee: **HOLTEC INTERNATIONAL**

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/451,885**

(22) Filed: **Aug. 18, 2023**

(65) **Prior Publication Data**

US 2024/0029906 A1 Jan. 25, 2024

**Related U.S. Application Data**

(63) Continuation of application No. 17/831,809, filed on Jun. 3, 2022, now Pat. No. 11,769,602, which is a continuation of application No. 17/181,439, filed on Feb. 22, 2021, now Pat. No. 11,373,775.

(60) Provisional application No. 62/979,640, filed on Feb. 21, 2020.

(51) **Int. Cl.**  
**G21F 5/12** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **G21F 5/12** (2013.01)

(58) **Field of Classification Search**  
CPC ..... **G21F 5/12**  
USPC ..... 250/505.1, 506.1, 507, 1, 515.1, 516.1, 250/517.1, 518.1, 519.1

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,851,286 A	7/1989	Maurice	
4,883,637 A	11/1989	McDaniels, Jr.	
4,996,019 A	2/1991	Catalayoud et al.	
5,037,147 A	8/1991	Fay	
5,127,535 A	7/1992	Shinno	
10,692,617 B2	6/2020	Singh	
11,373,775 B2 *	6/2022	Singh	G21F 5/12
11,610,696 B2 *	3/2023	Singh	G21F 5/14

(Continued)

FOREIGN PATENT DOCUMENTS

DE	102008060654 A1	7/2010
JP	H2-095898 A	7/1990

(Continued)


*Primary Examiner* — Nicole M Ippolito

(74) *Attorney, Agent, or Firm* — The Belles Group, P.C.

(57) **ABSTRACT**

A nuclear waste cask in one embodiment includes an axially elongated cask body defining a longitudinally-extending opening forming an entrance to an internal storage cavity of the cask configured for holding radioactive nuclear waste materials. A closure lid detachably coupled to the cask body at the top opening seals the cavity. A cask locking mechanism includes a plurality of first locking protrusions spaced apart on the lid which are selectively interlockable with a plurality of second locking protrusions spaced apart on the cask body to lock the lid to the cask body. The first locking protrusions may be disposed on slideable locking bars moveable between locked and unlocked positions while the lid remains stationary on the cask body. Hydraulic or pneumatic actuators may be used to change position of the locking bars. The cask and lid may include other features such as impact absorbers and lifting elements.

**13 Claims, 29 Drawing Sheets**

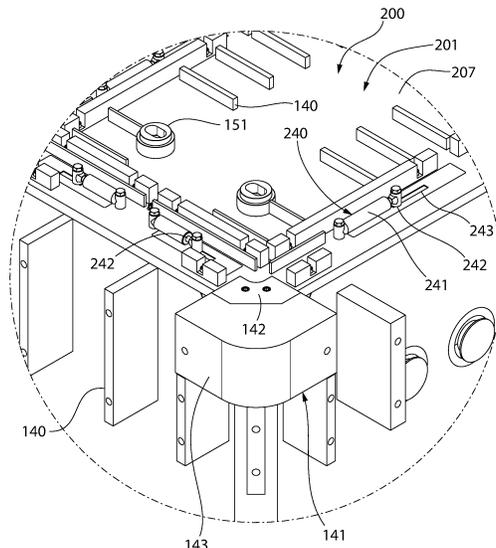

(56)

**References Cited**

U.S. PATENT DOCUMENTS

11,769,602	B2 *	9/2023	Singh .....	G21F 5/12 250/517.1
2015/0090686	A1	4/2015	Batzel et al.	
2018/0005718	A1	1/2018	Singh	
2021/0272714	A1	9/2021	Singh	
2022/0367079	A1	11/2022	Singh	

FOREIGN PATENT DOCUMENTS

KR	10-1986-0003621	5/1986
WO	2021168401 A1	8/2021

\* cited by examiner

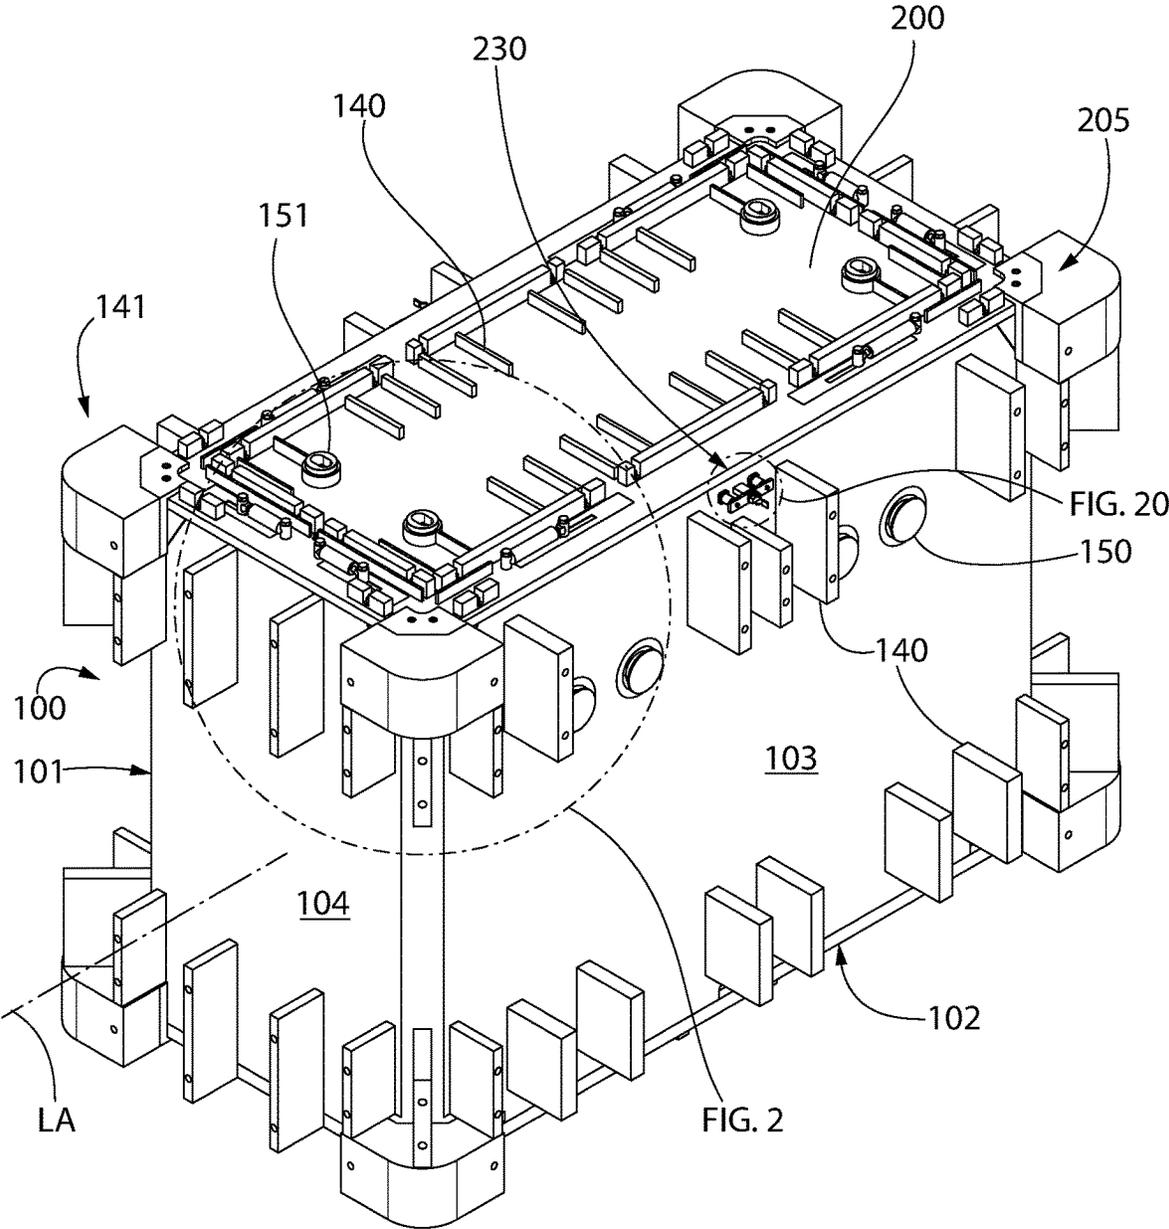


FIG. 1

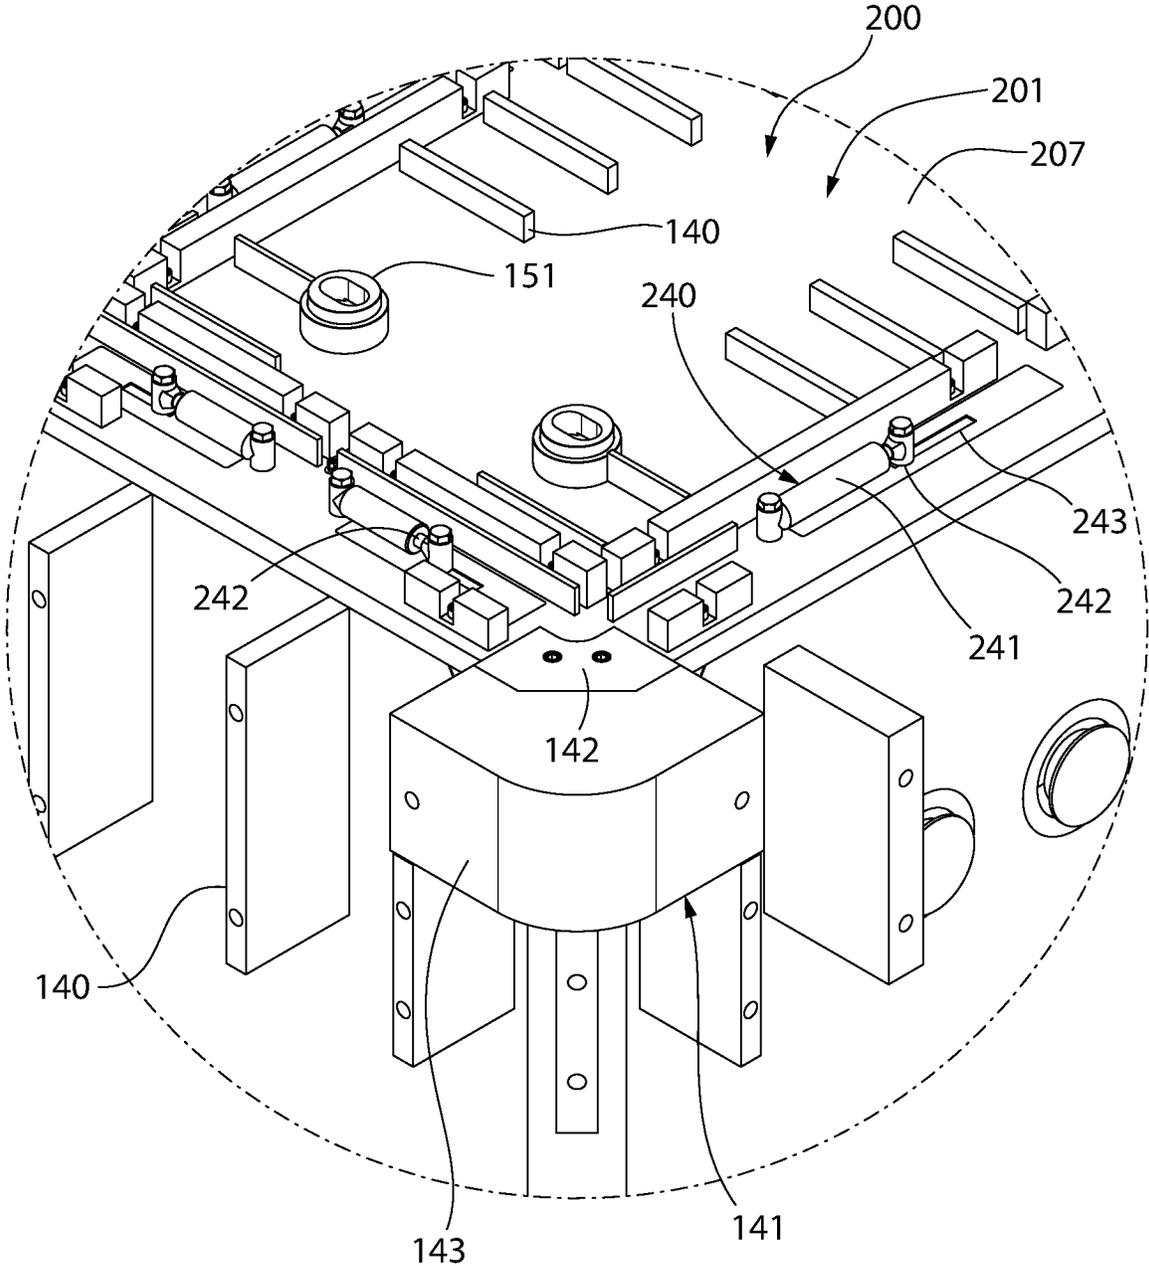


FIG. 2

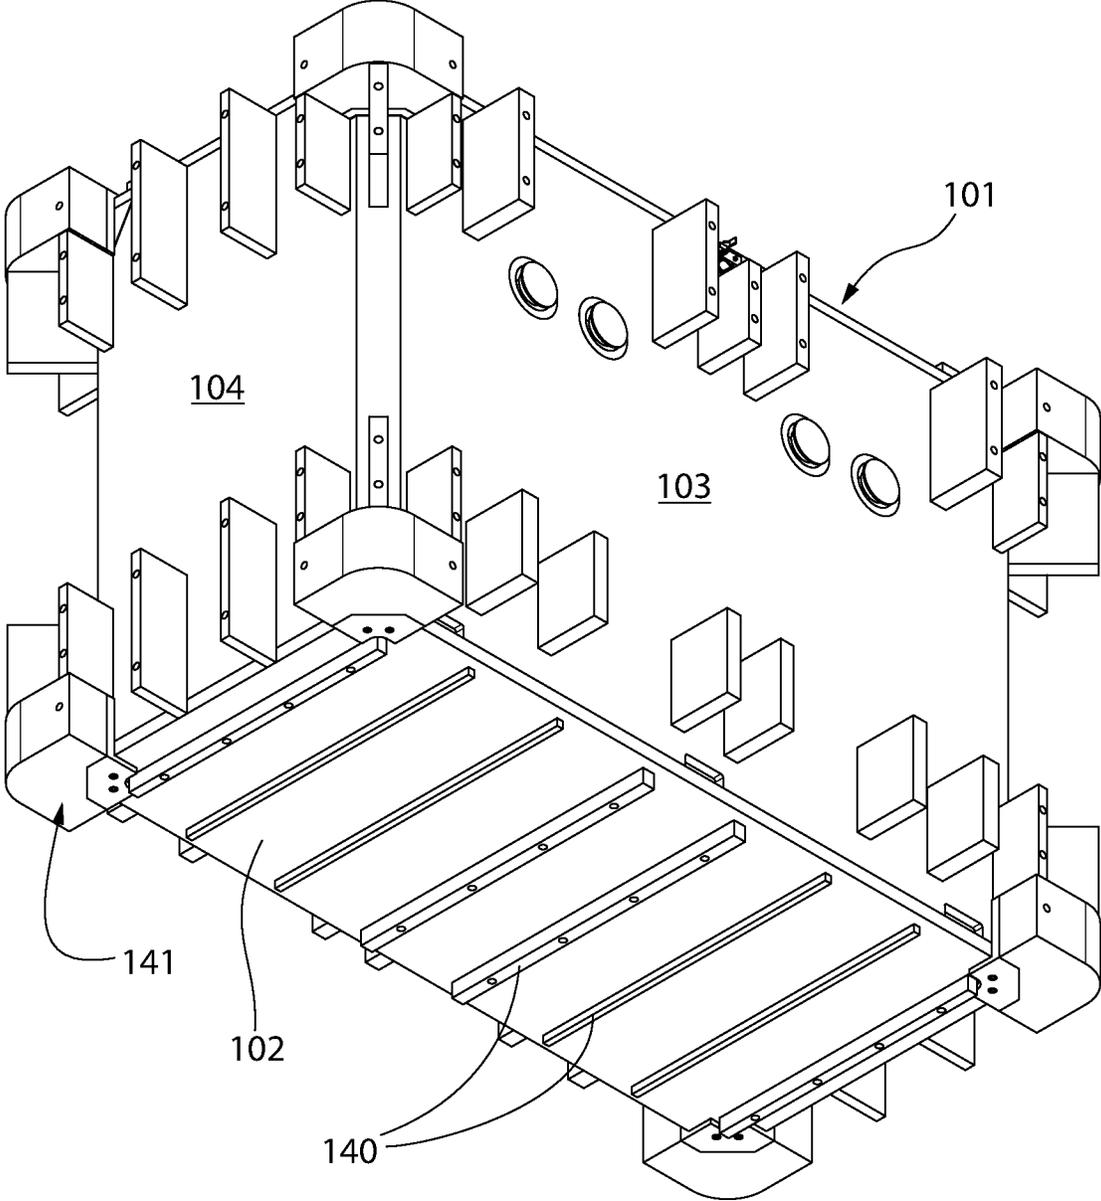


FIG. 3

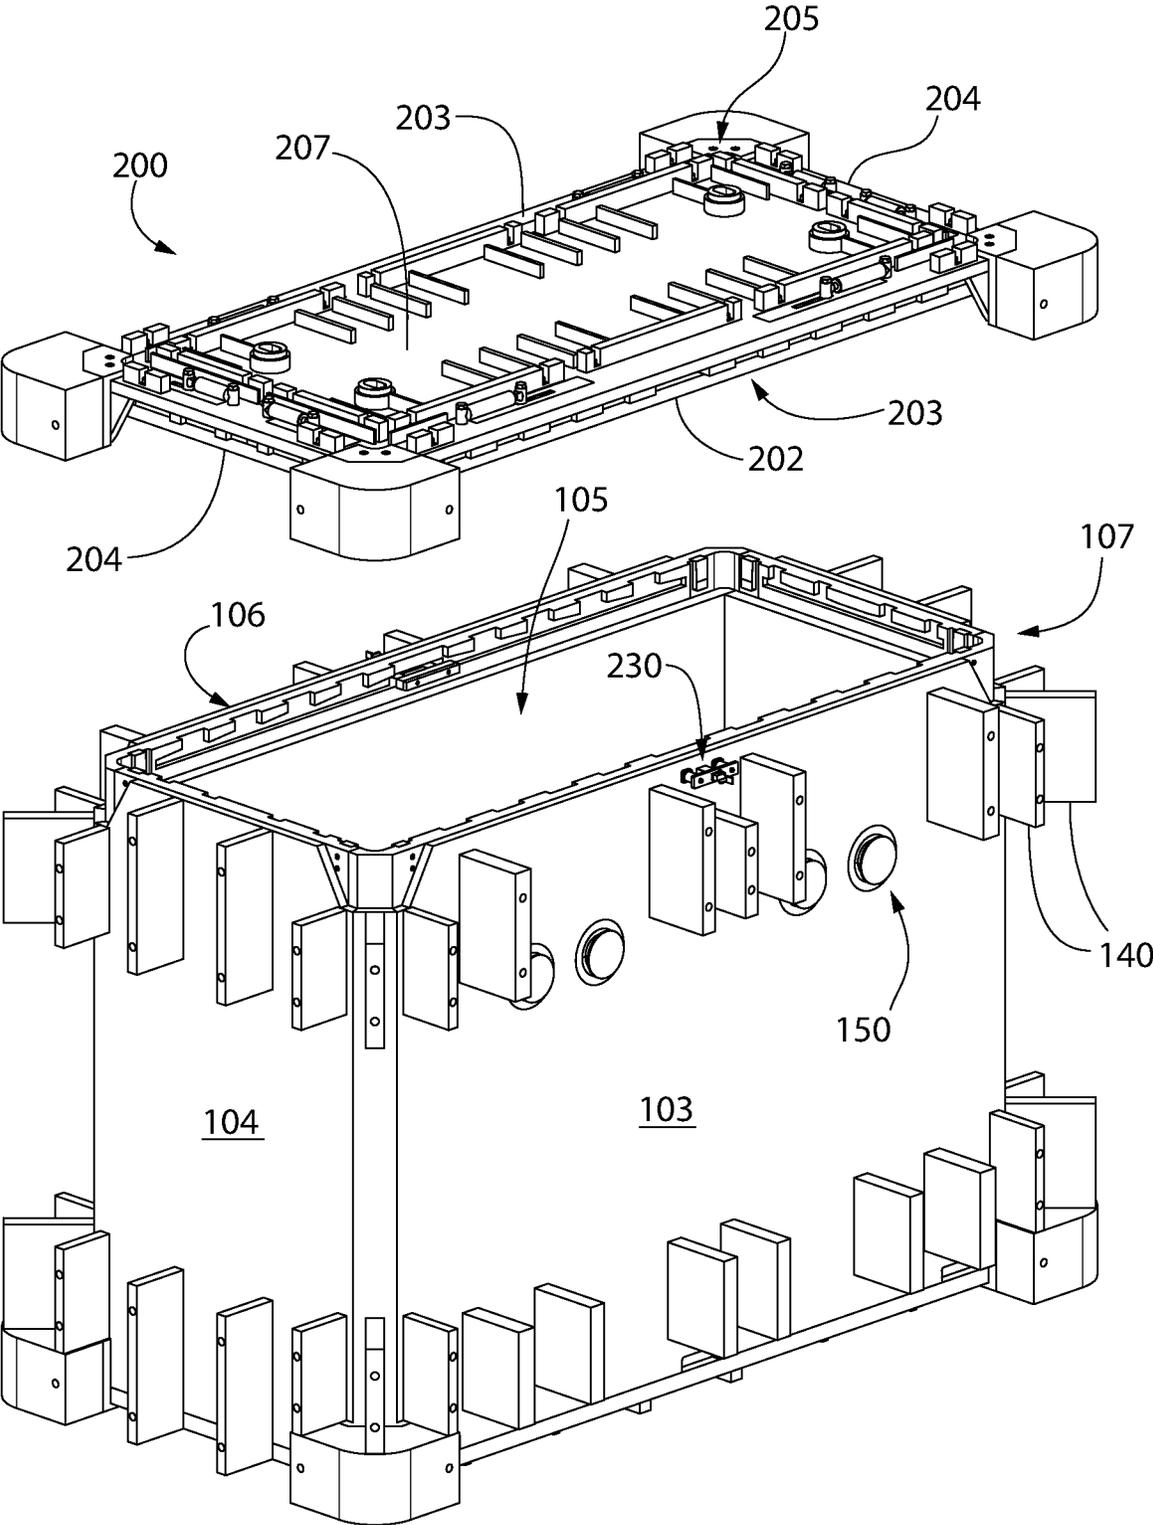


FIG. 4

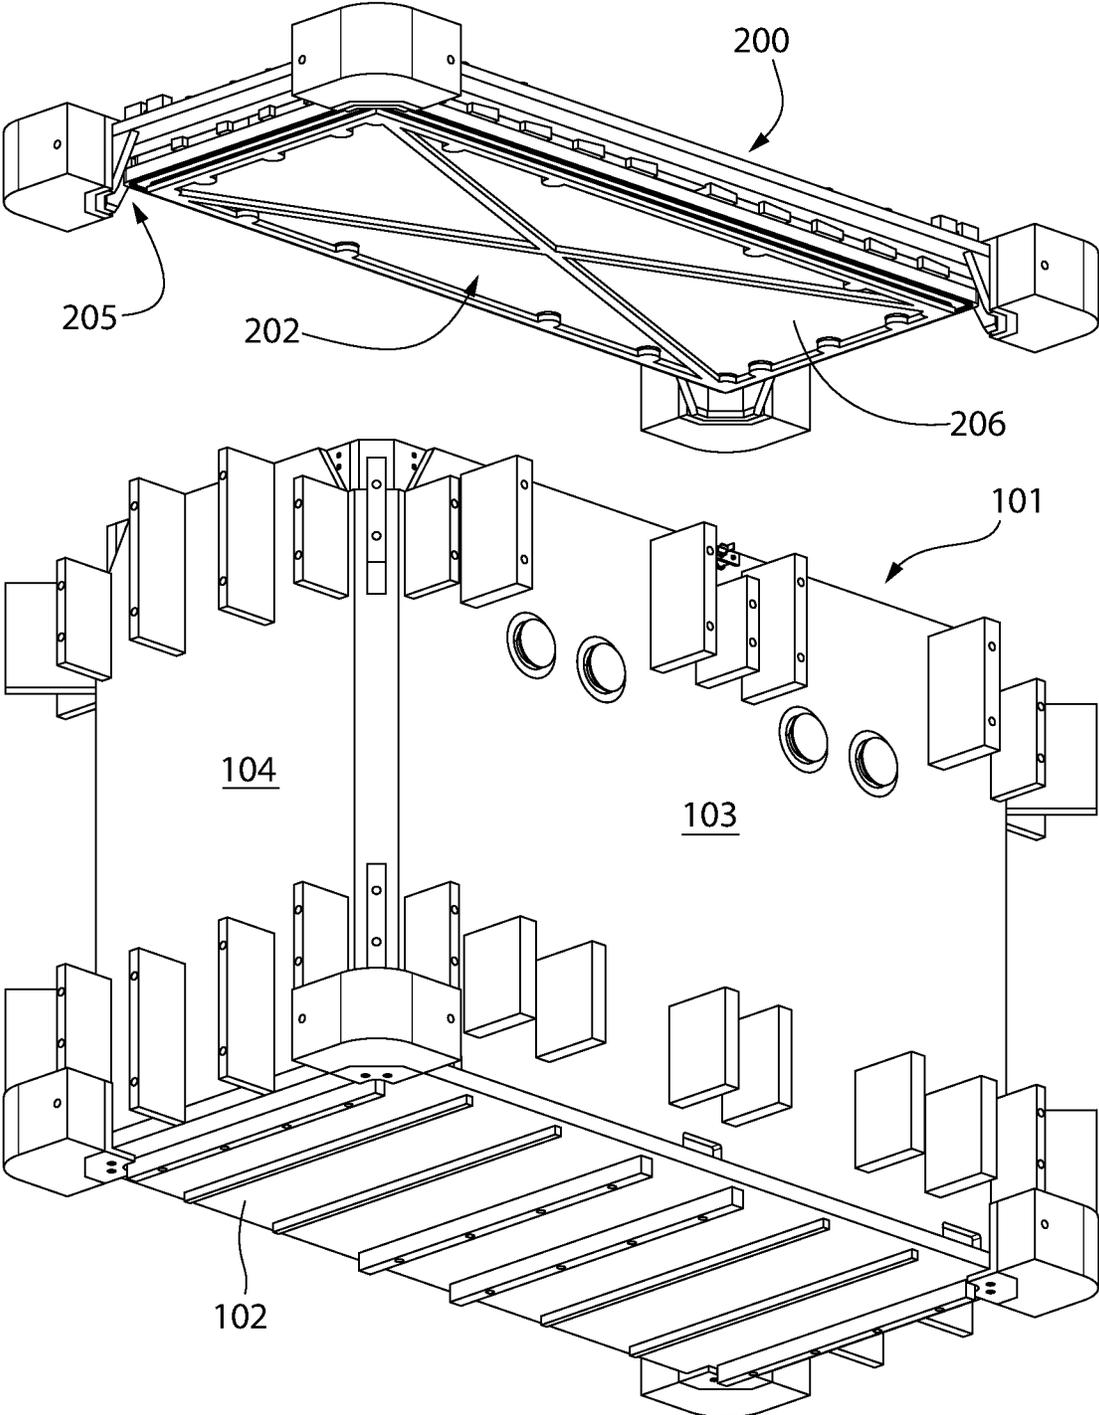


FIG. 5

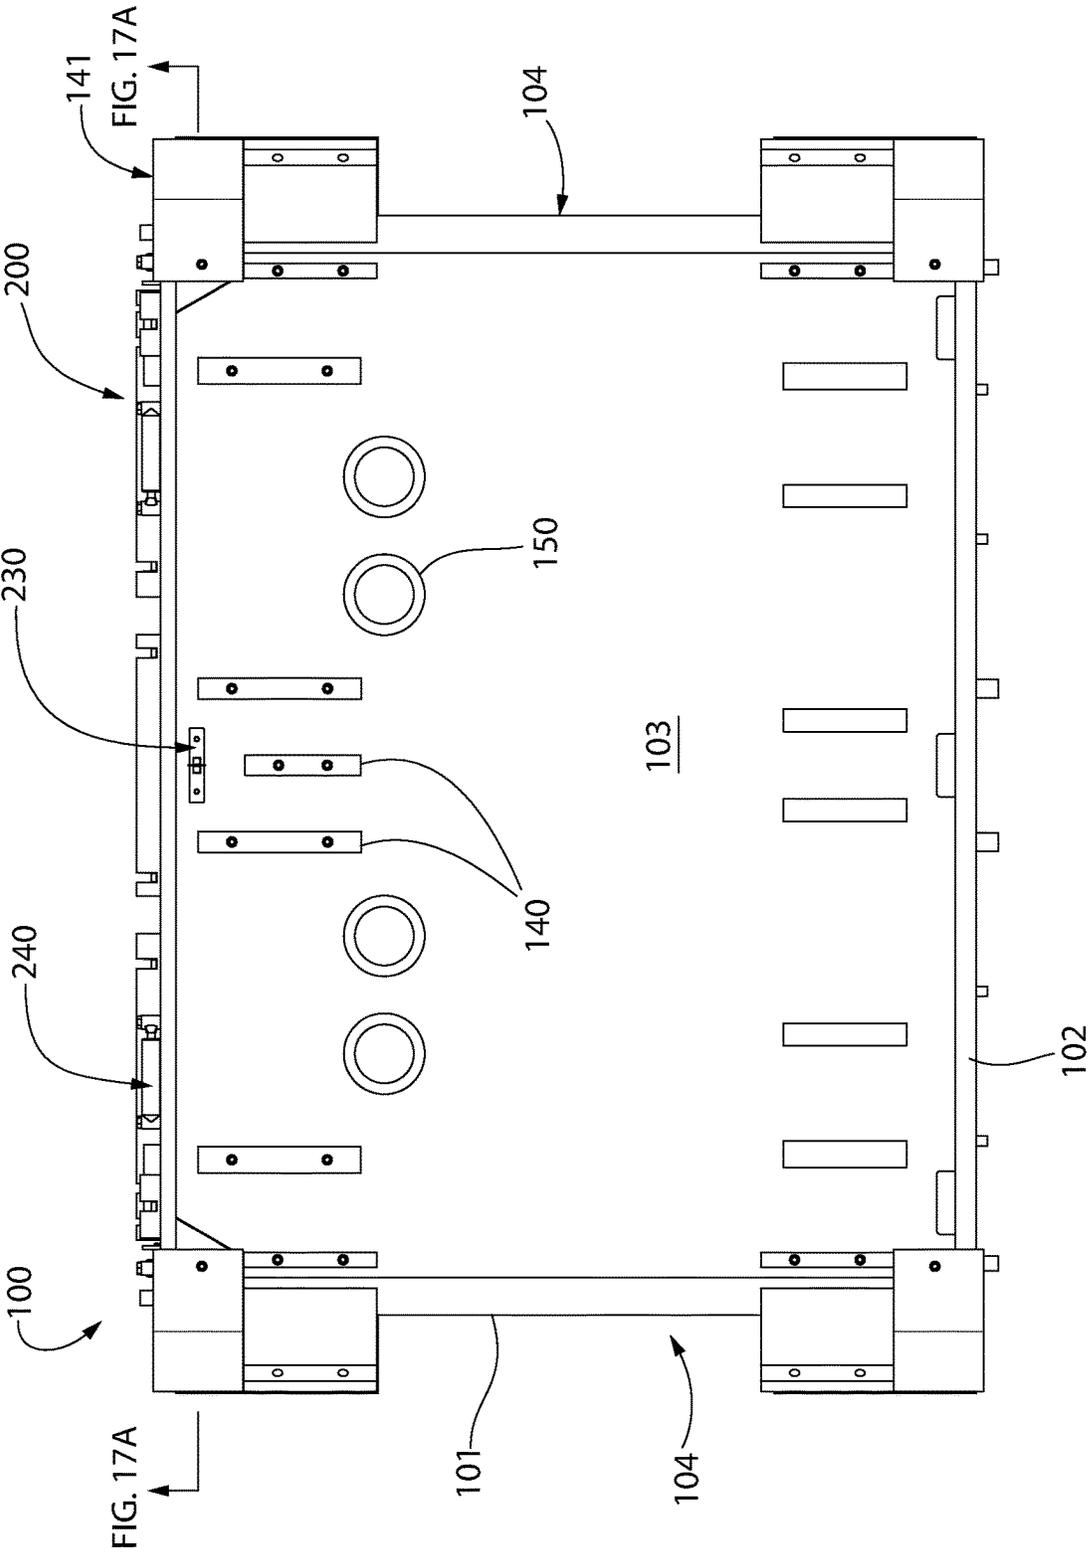


FIG. 6

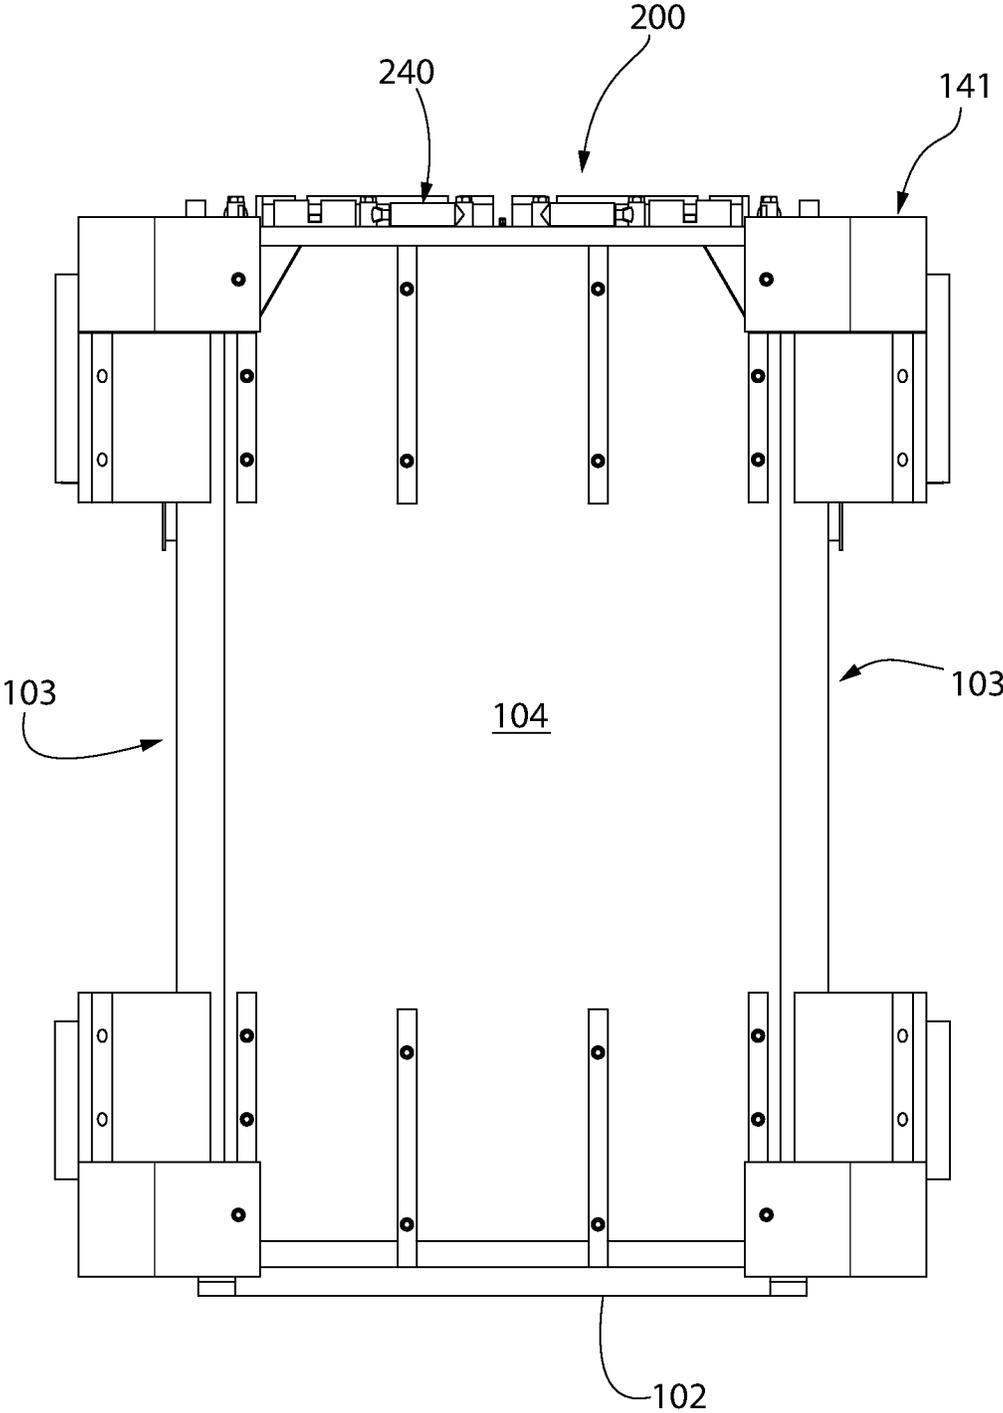


FIG. 7

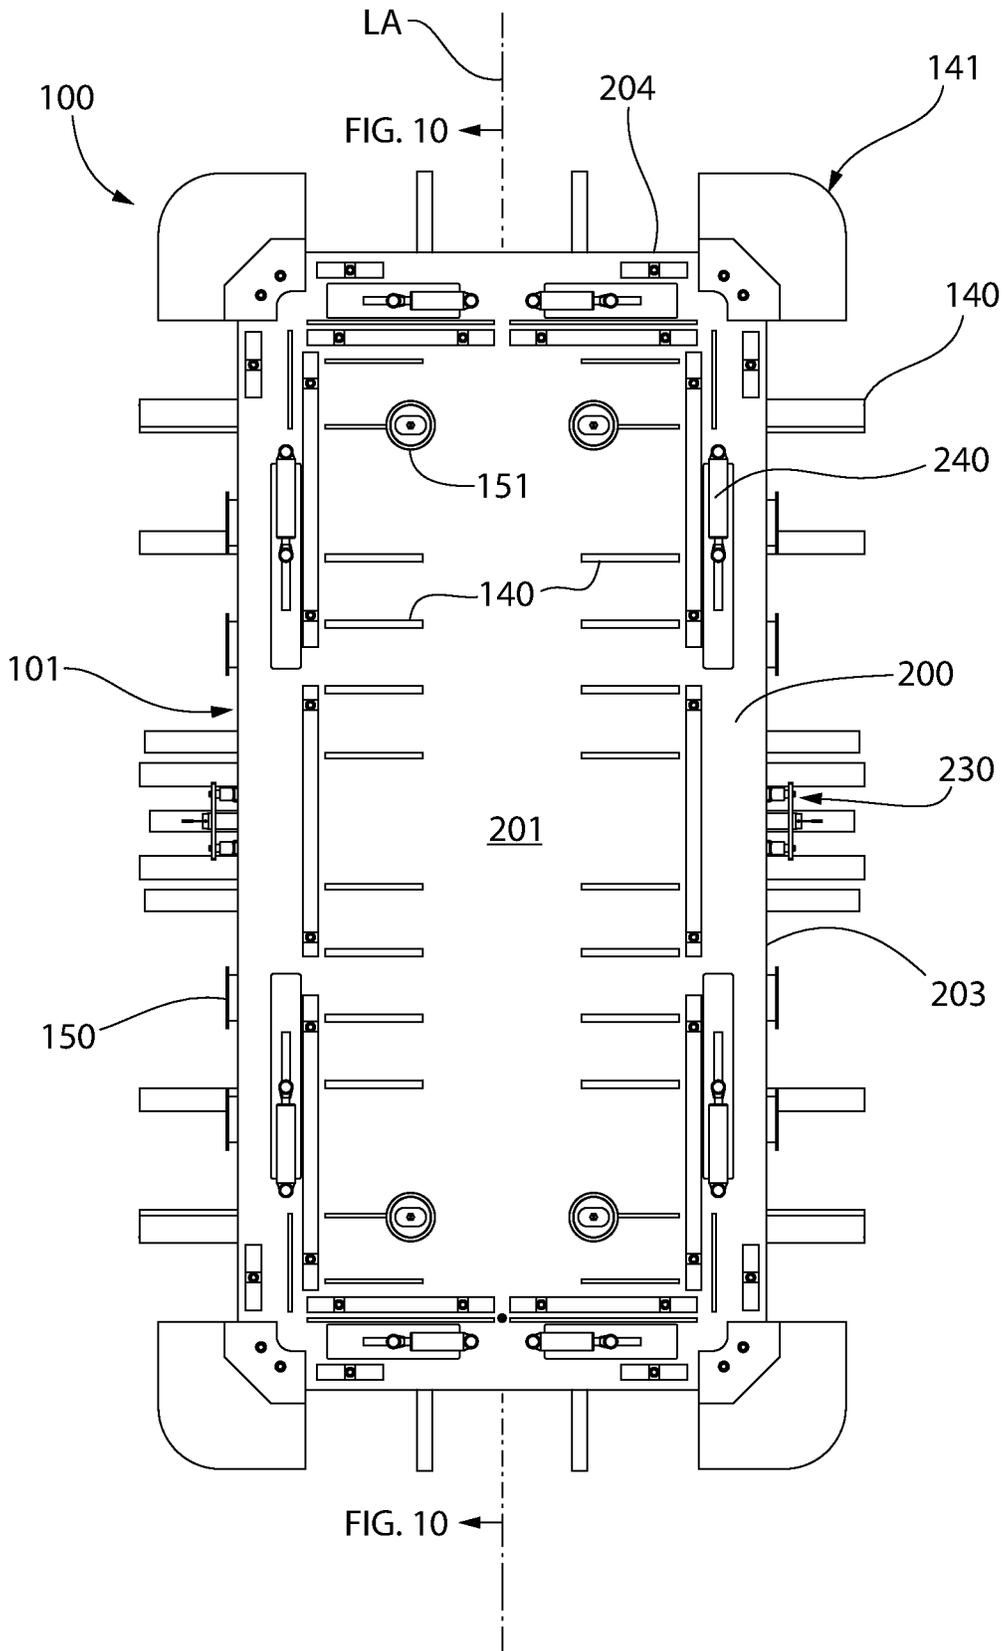


FIG. 8

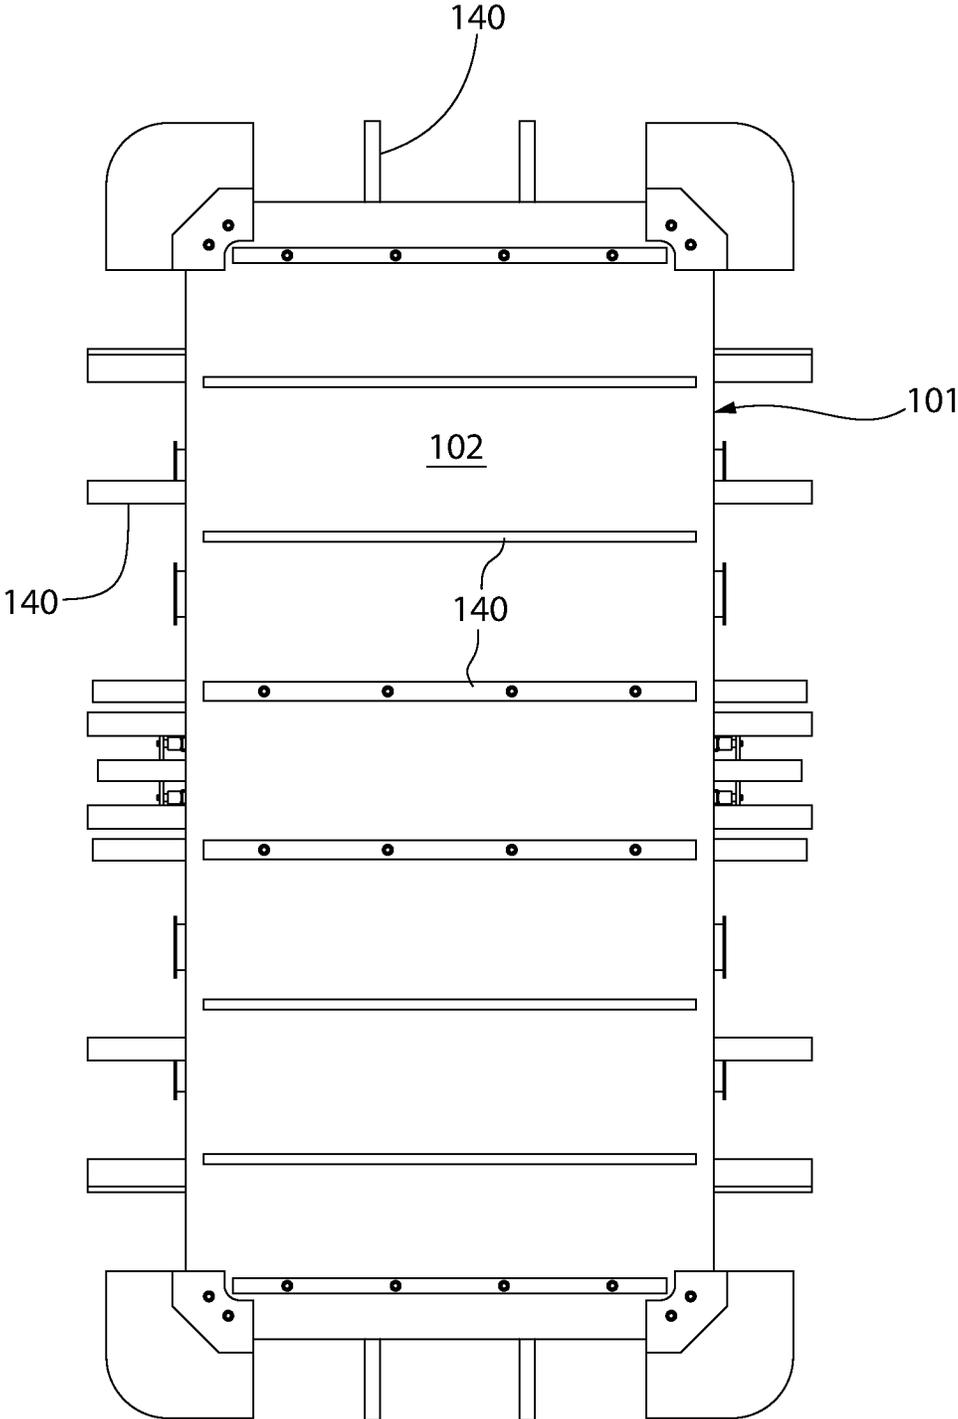


FIG. 9

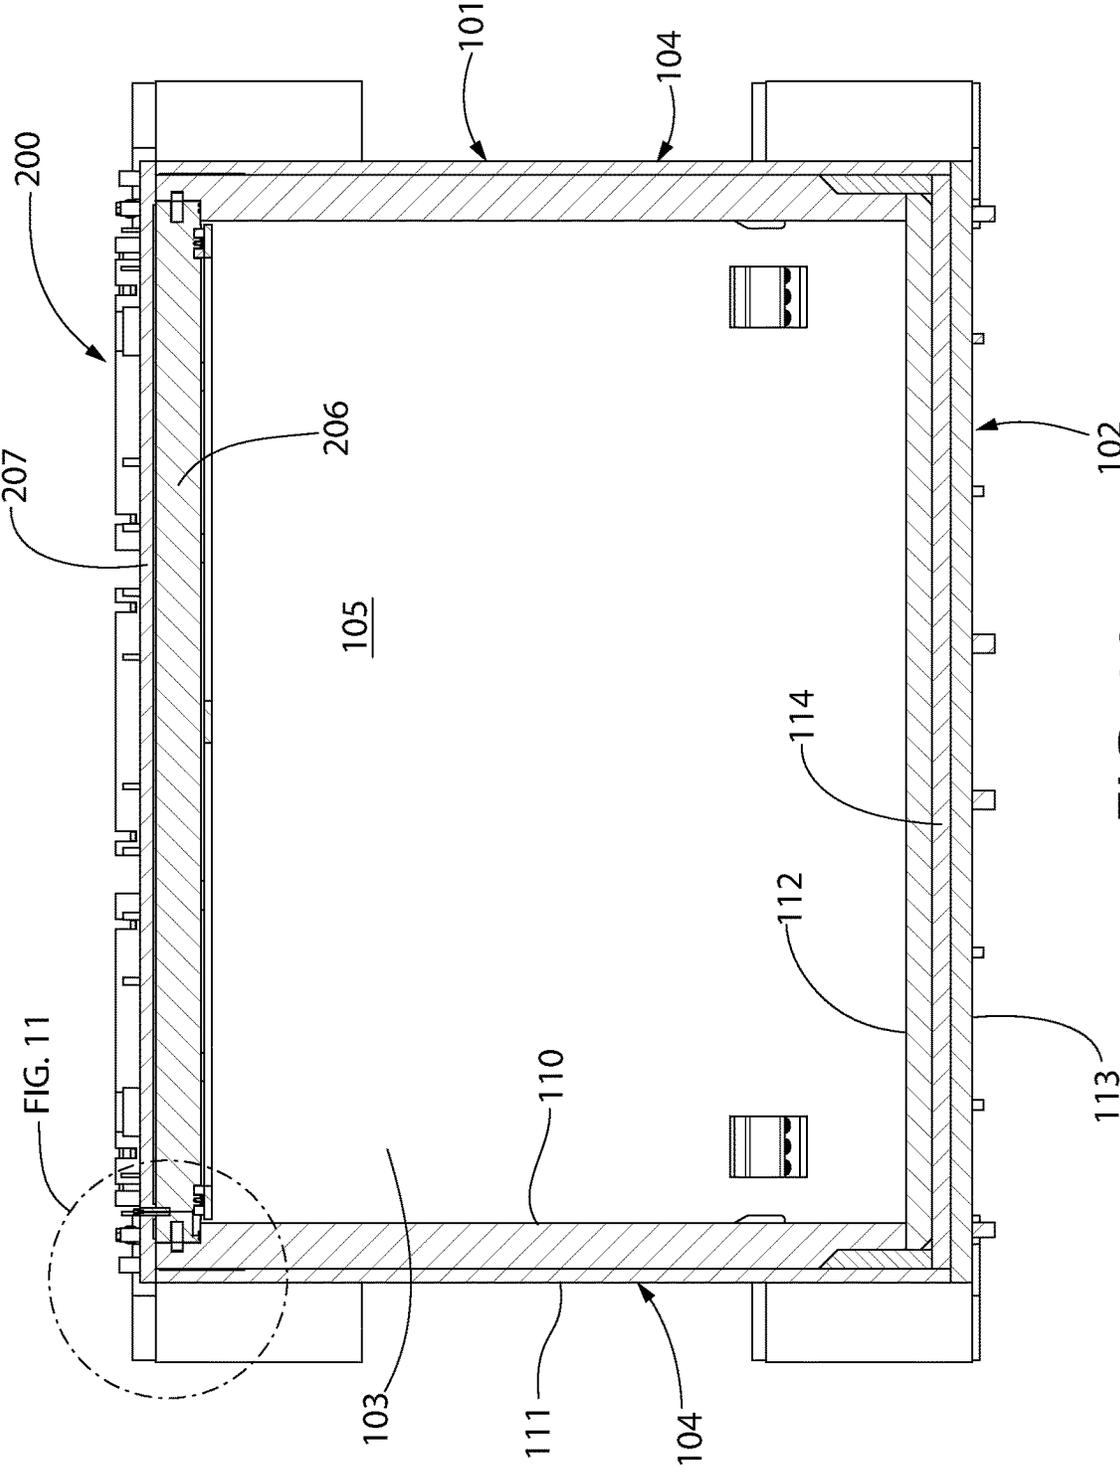


FIG. 10



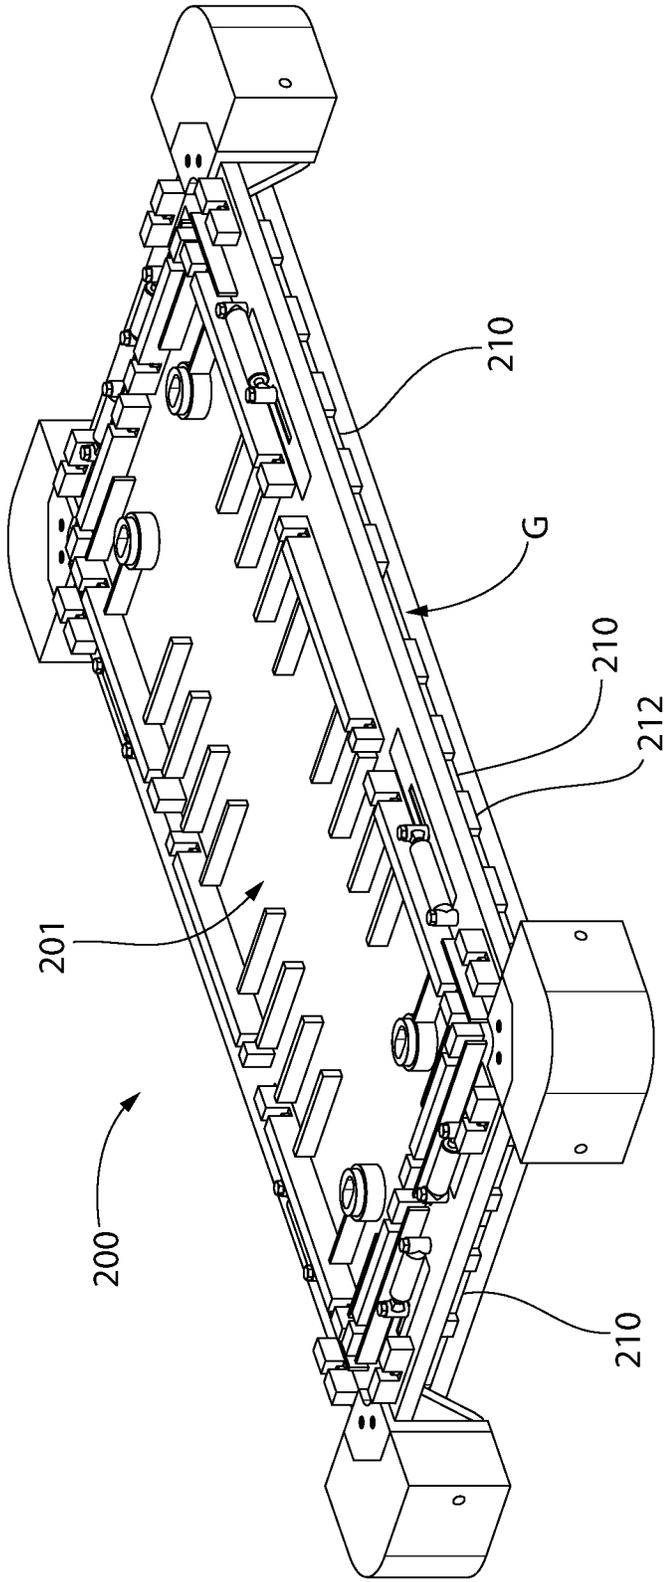


FIG. 12

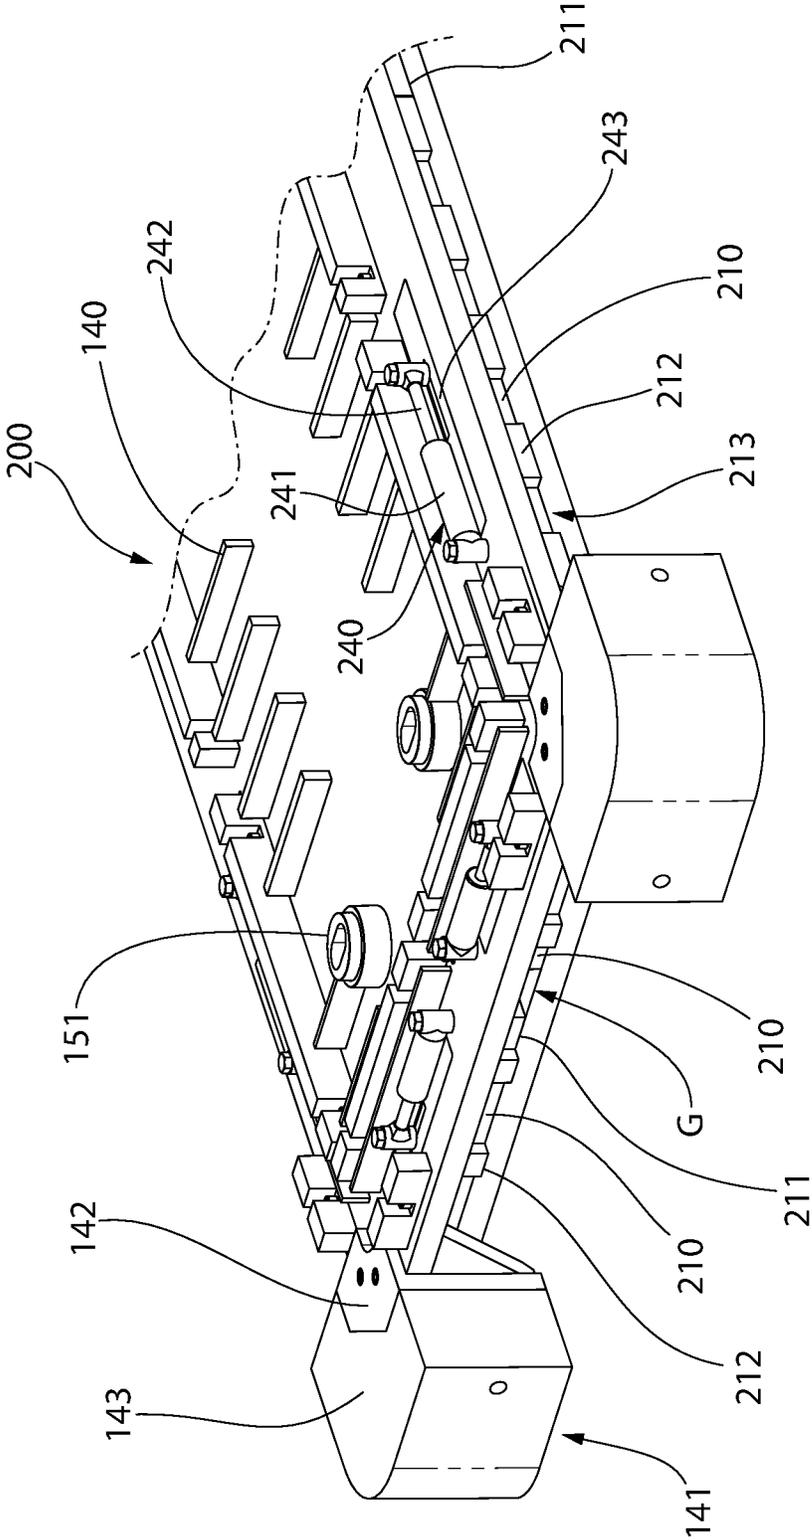


FIG. 13

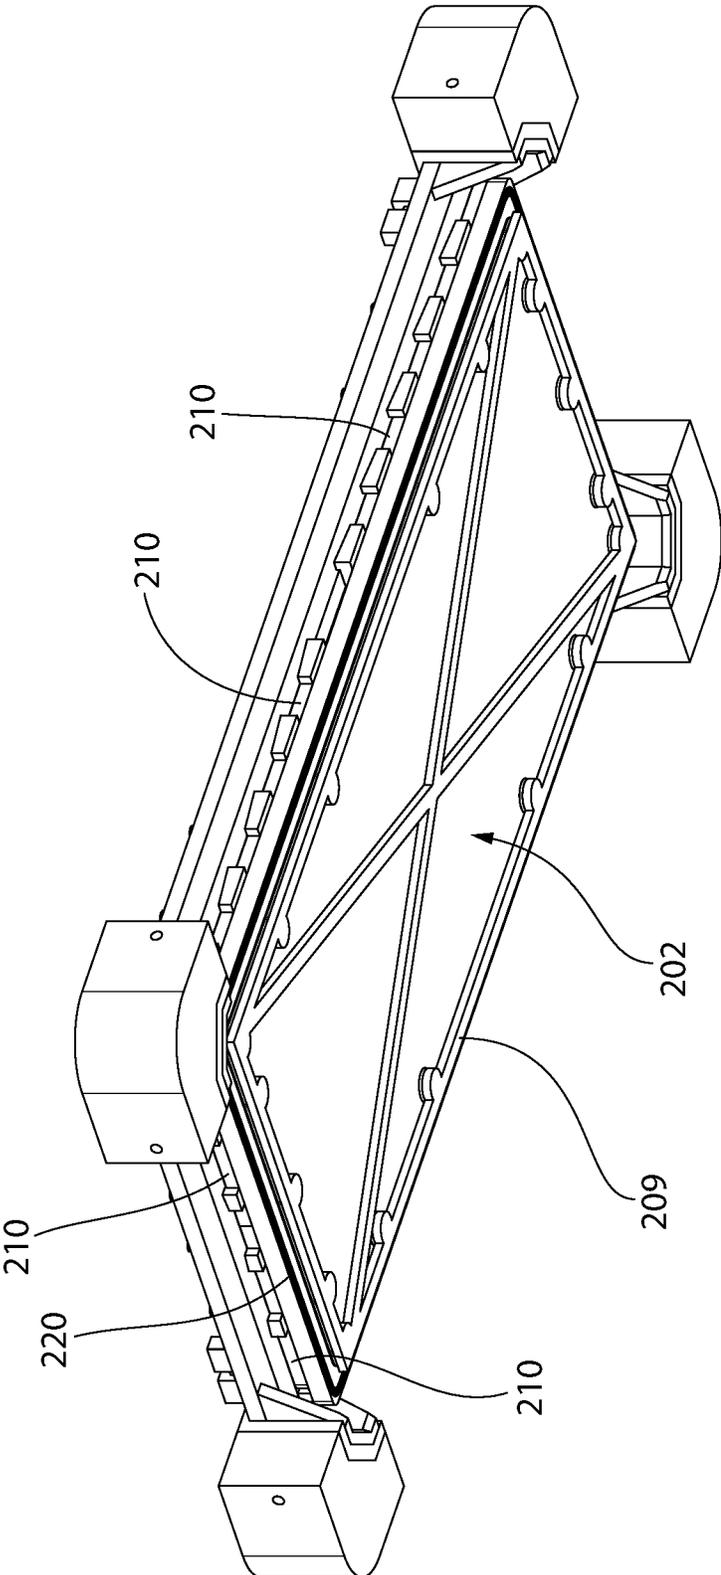


FIG. 14

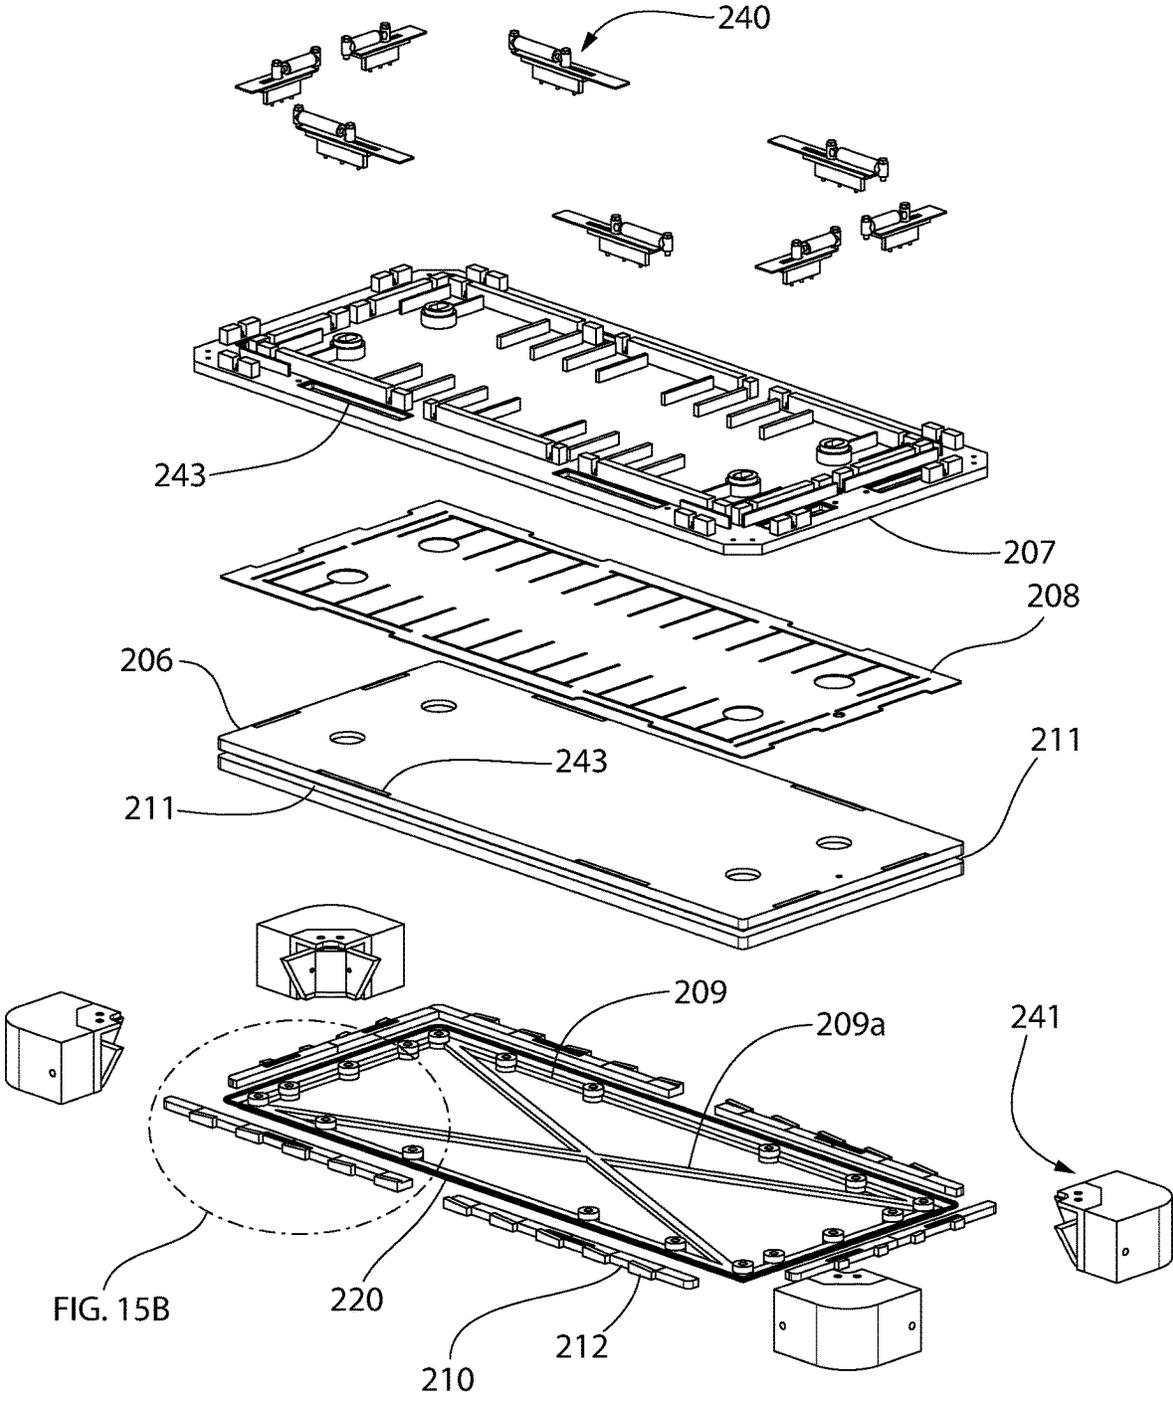


FIG. 15A

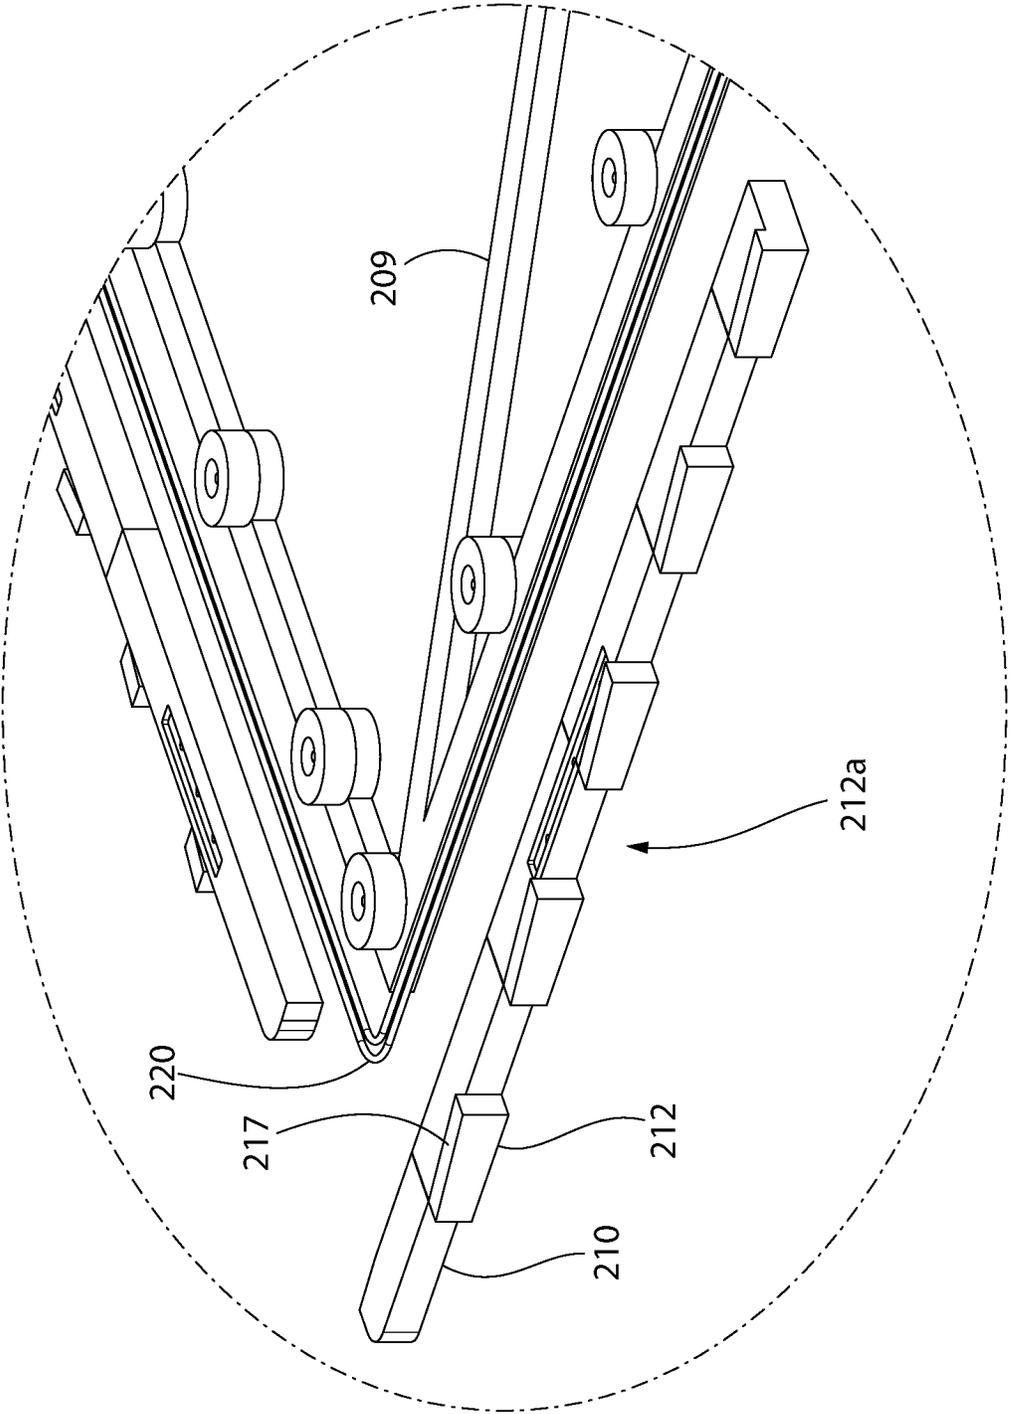


FIG. 15B

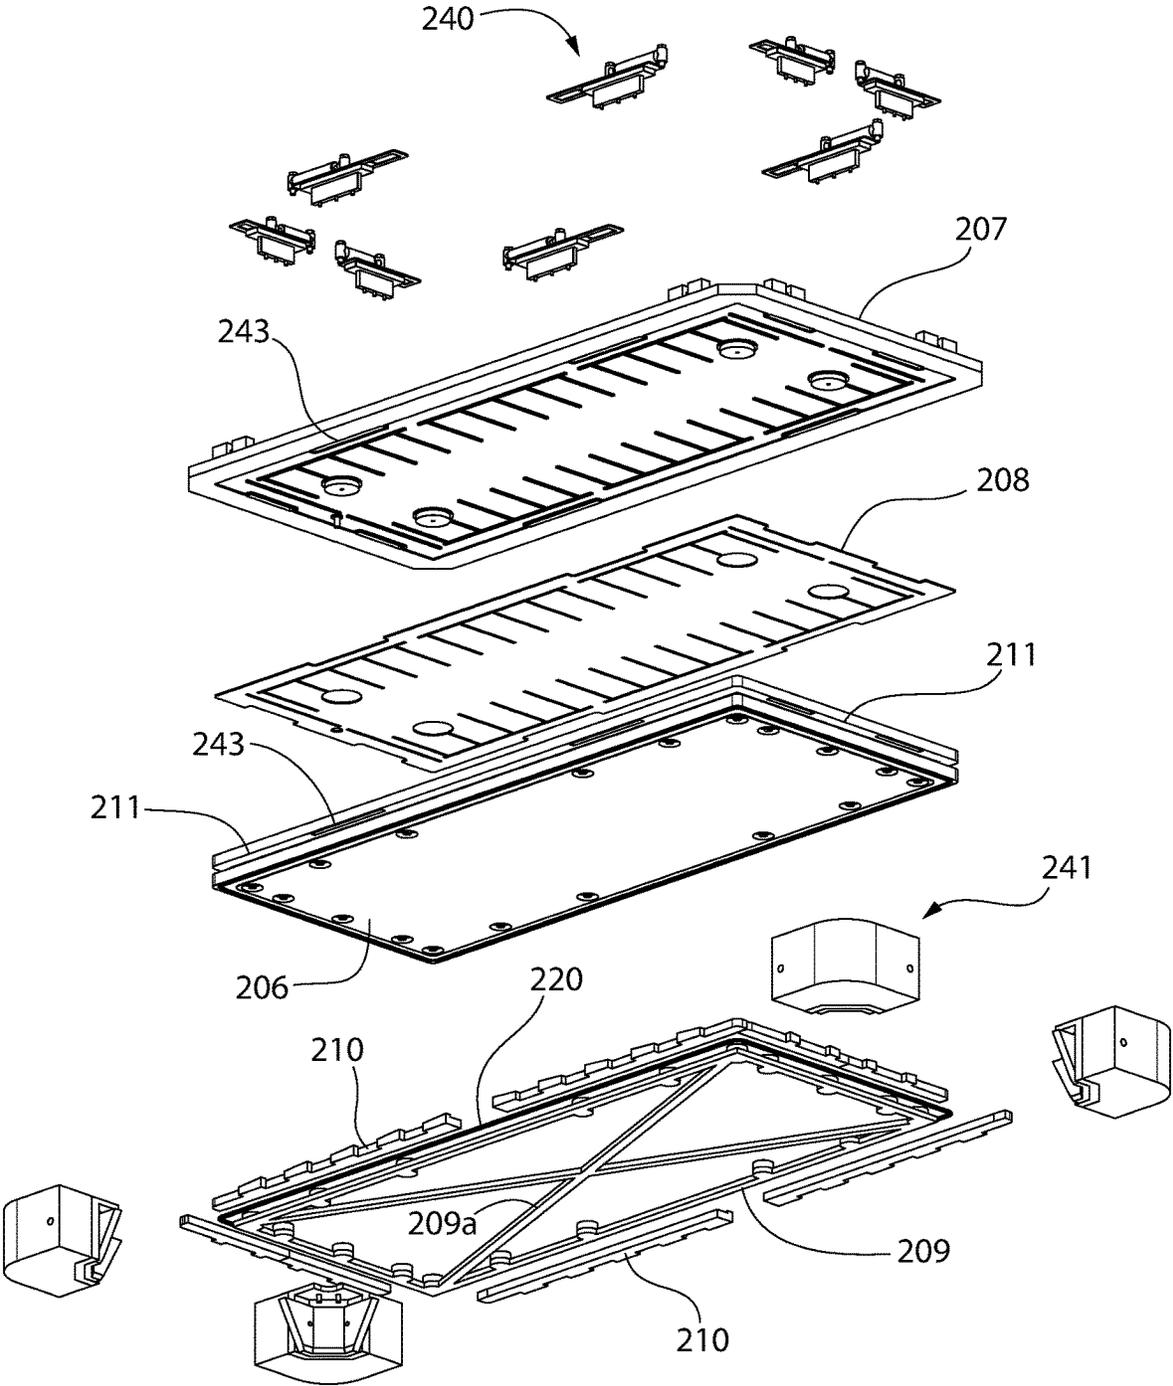


FIG. 16

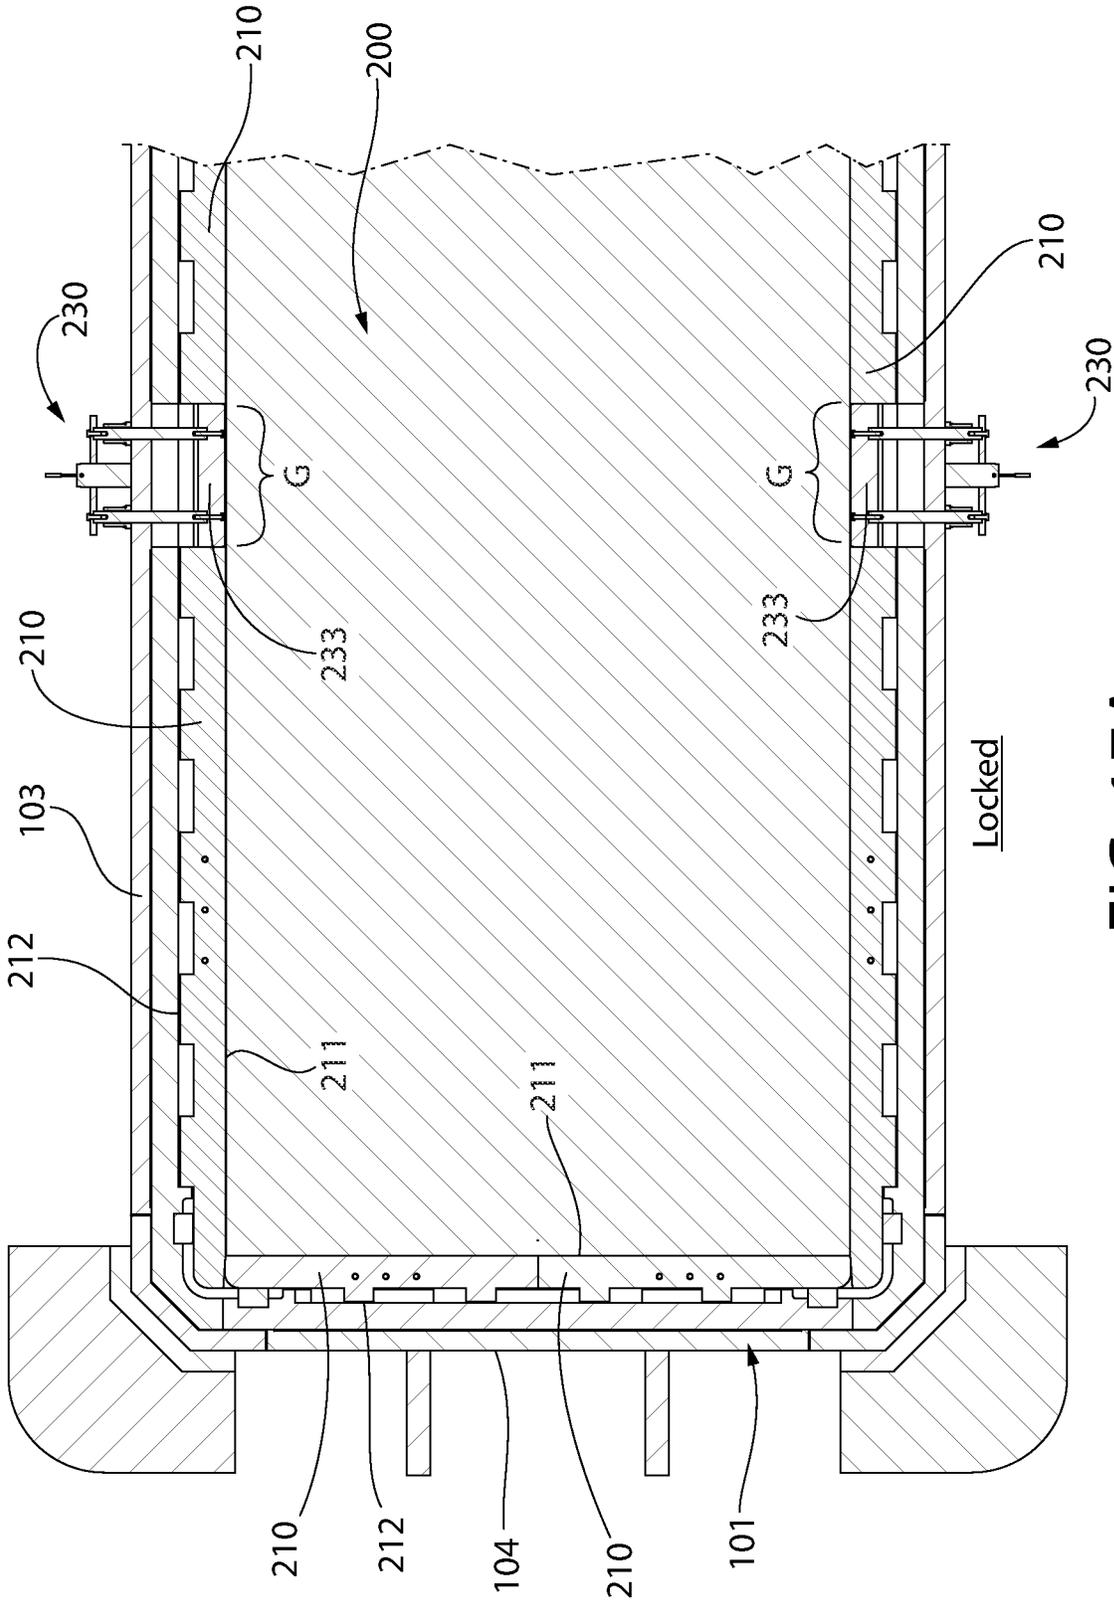


FIG. 17A



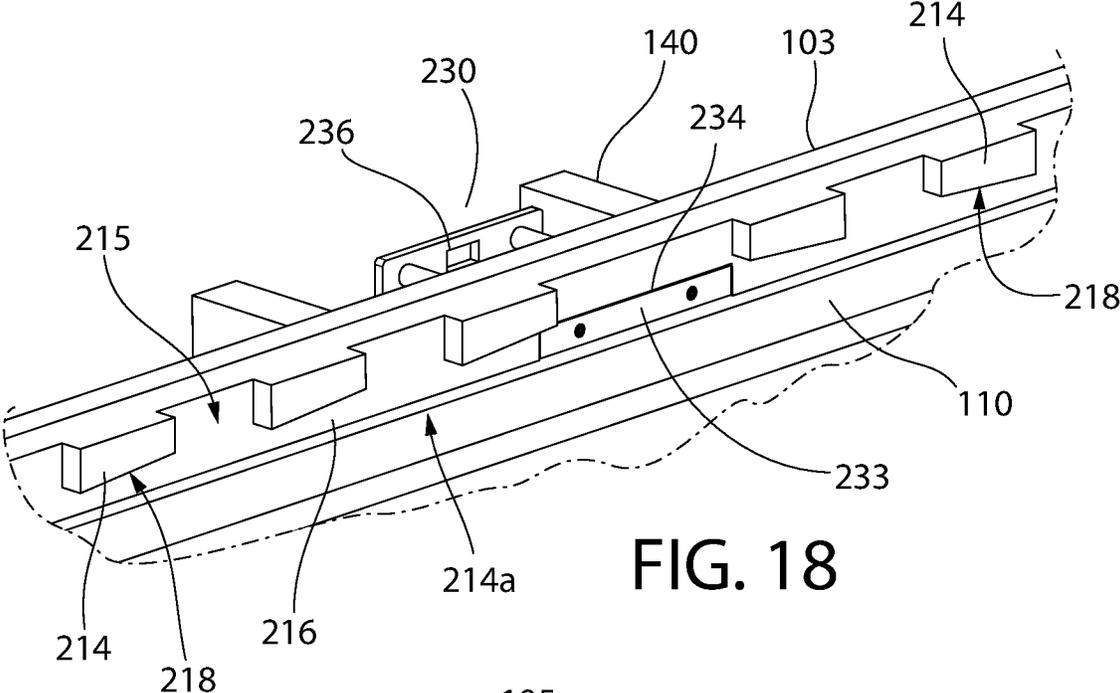


FIG. 18

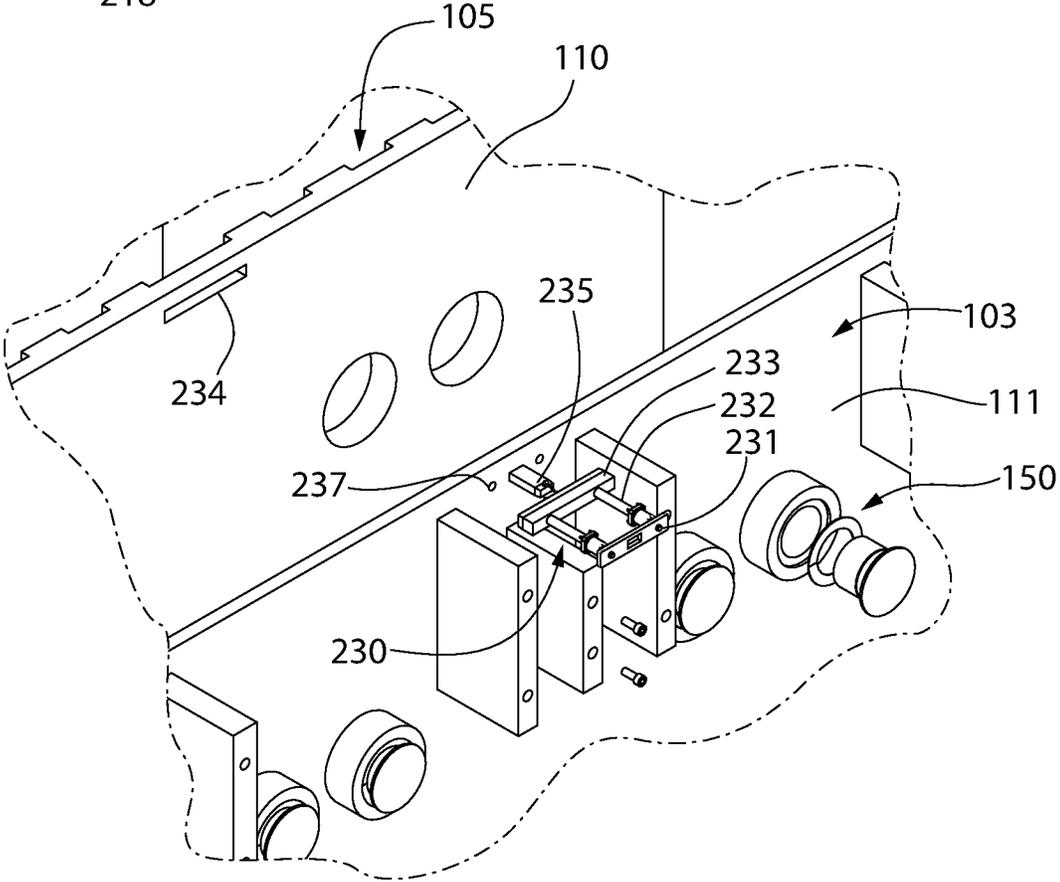


FIG. 19

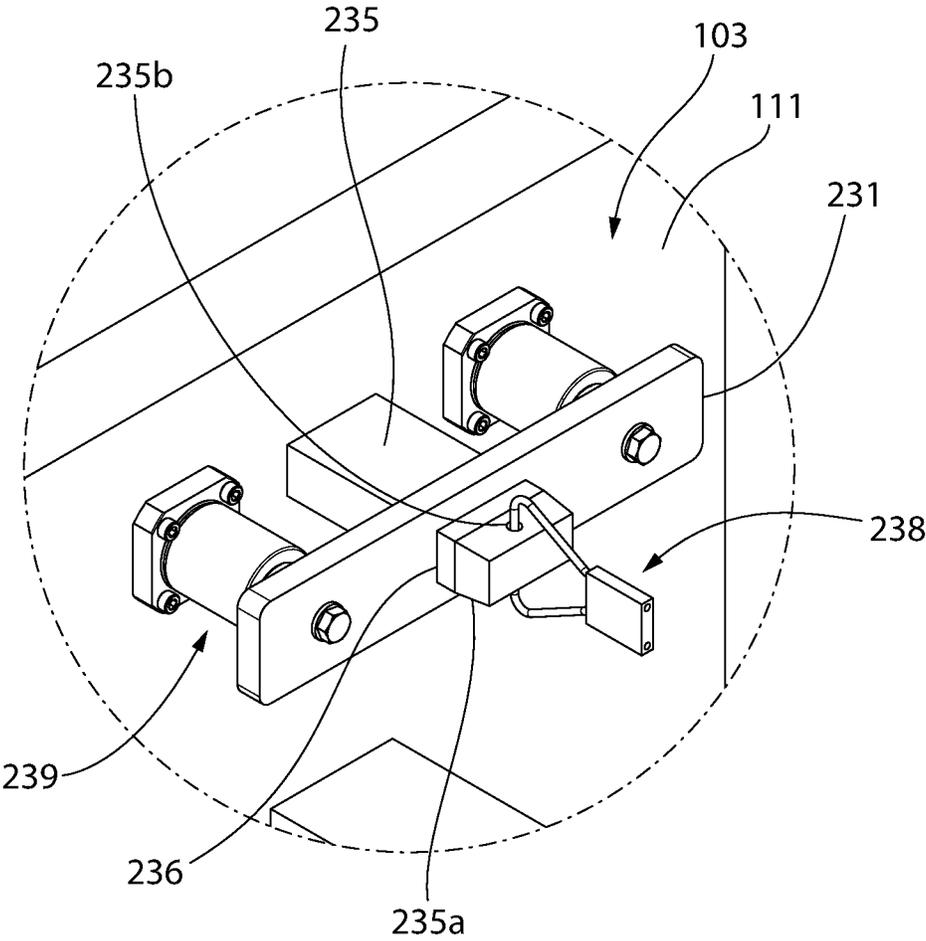


FIG. 20

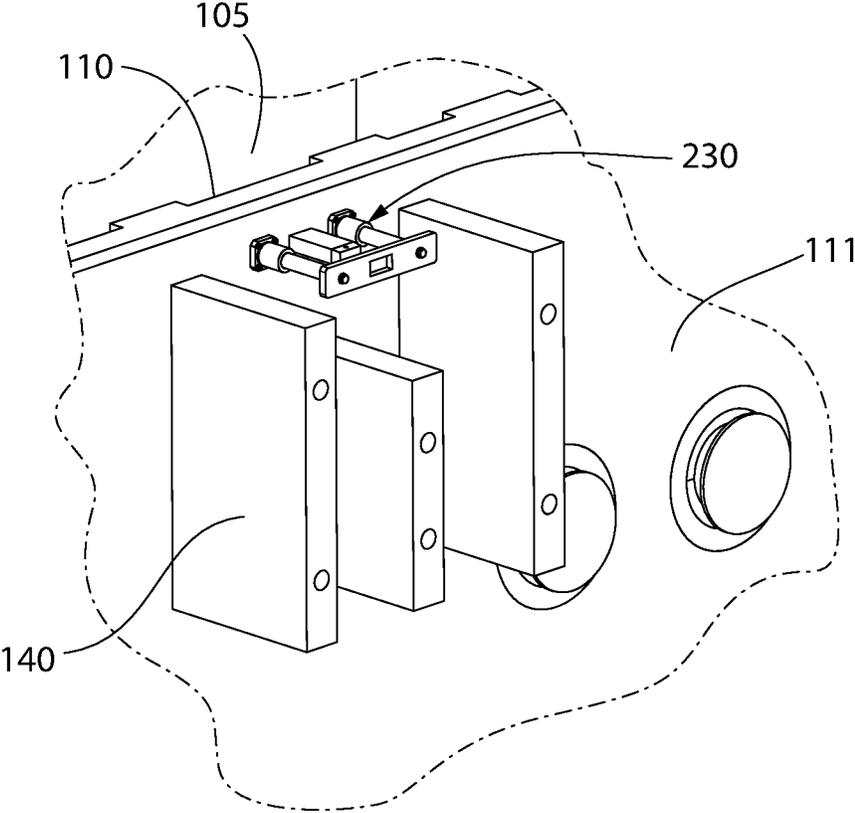


FIG. 21

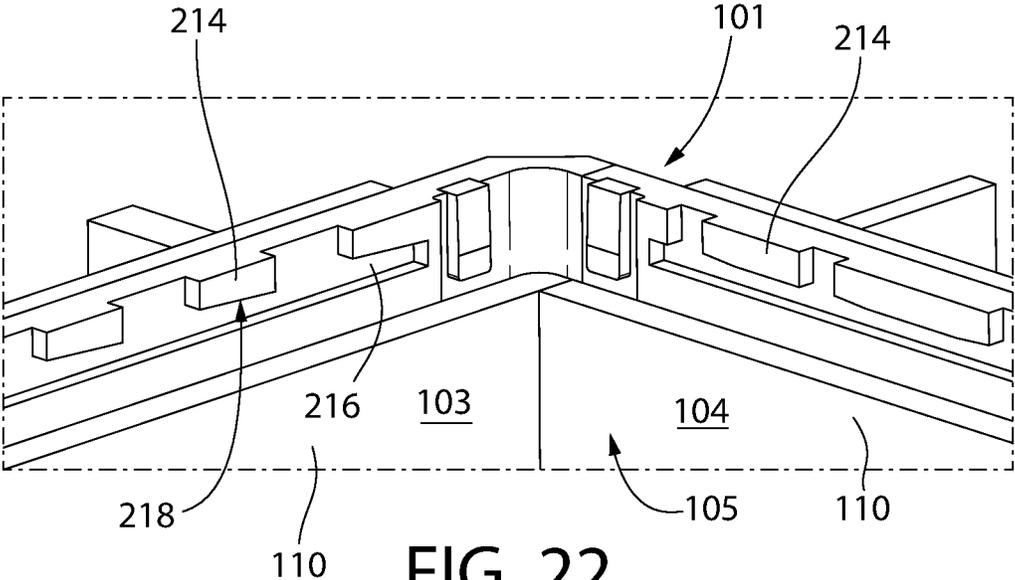


FIG. 22

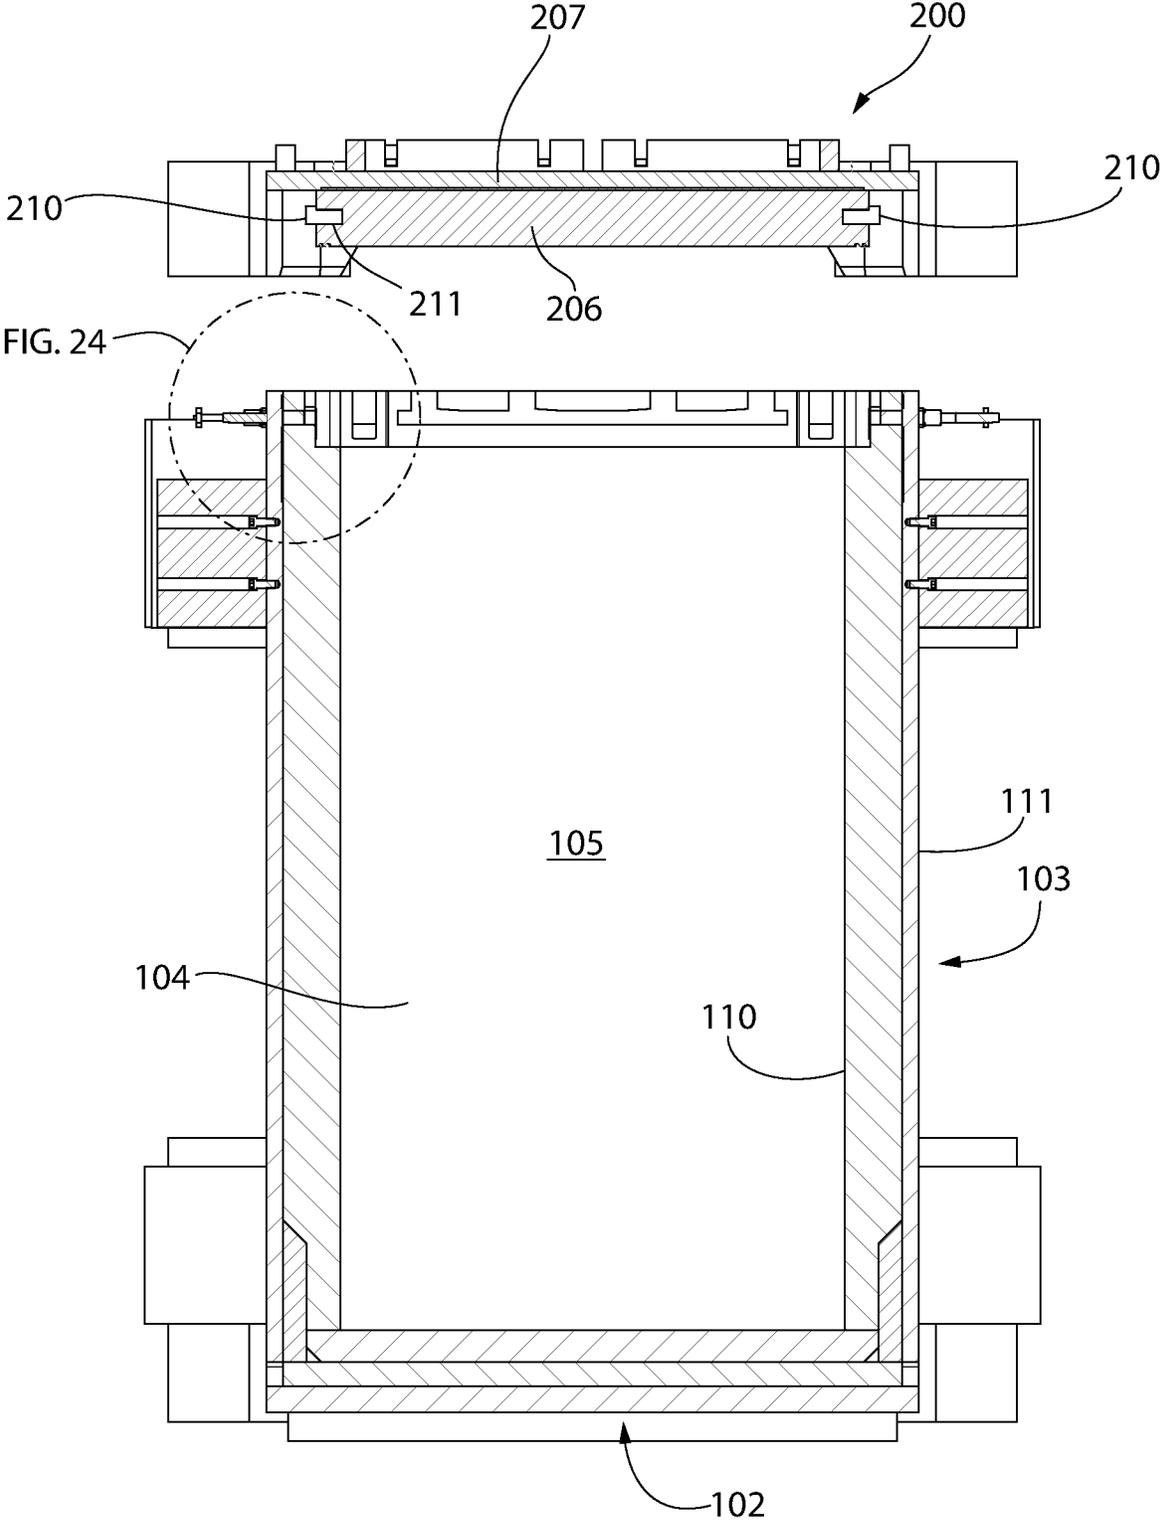


FIG. 23

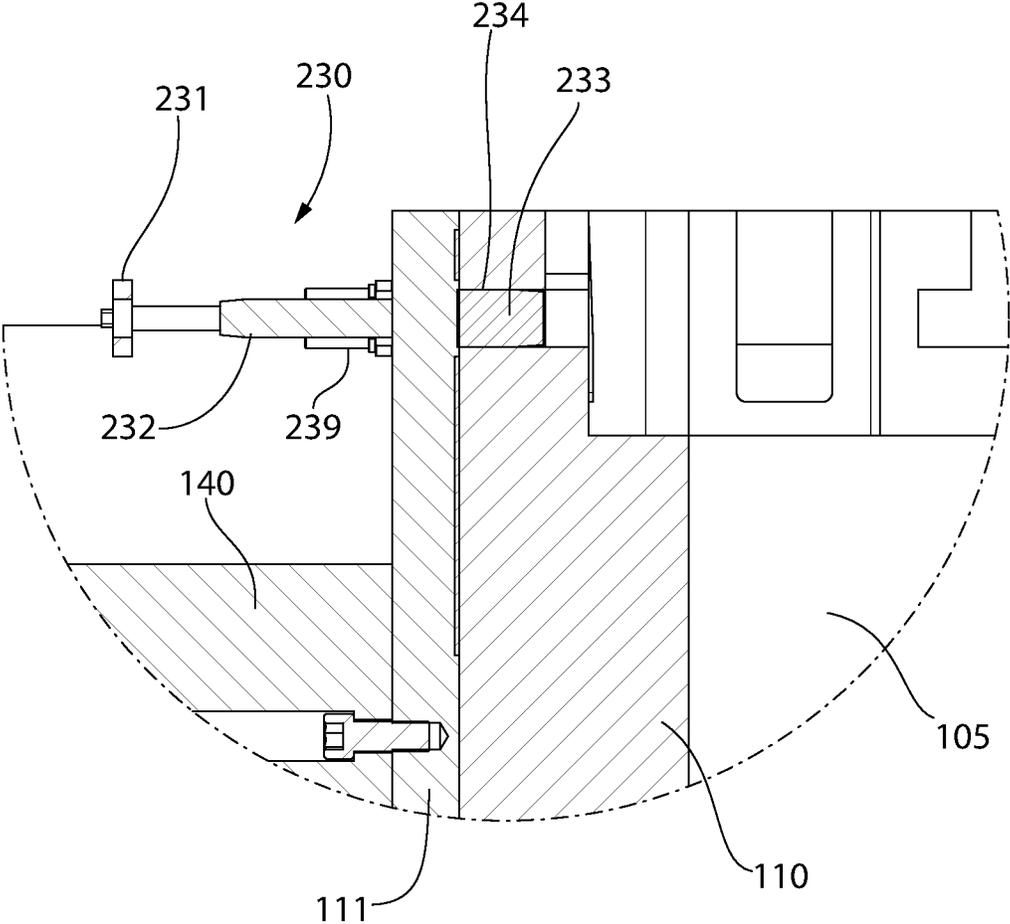


FIG. 24

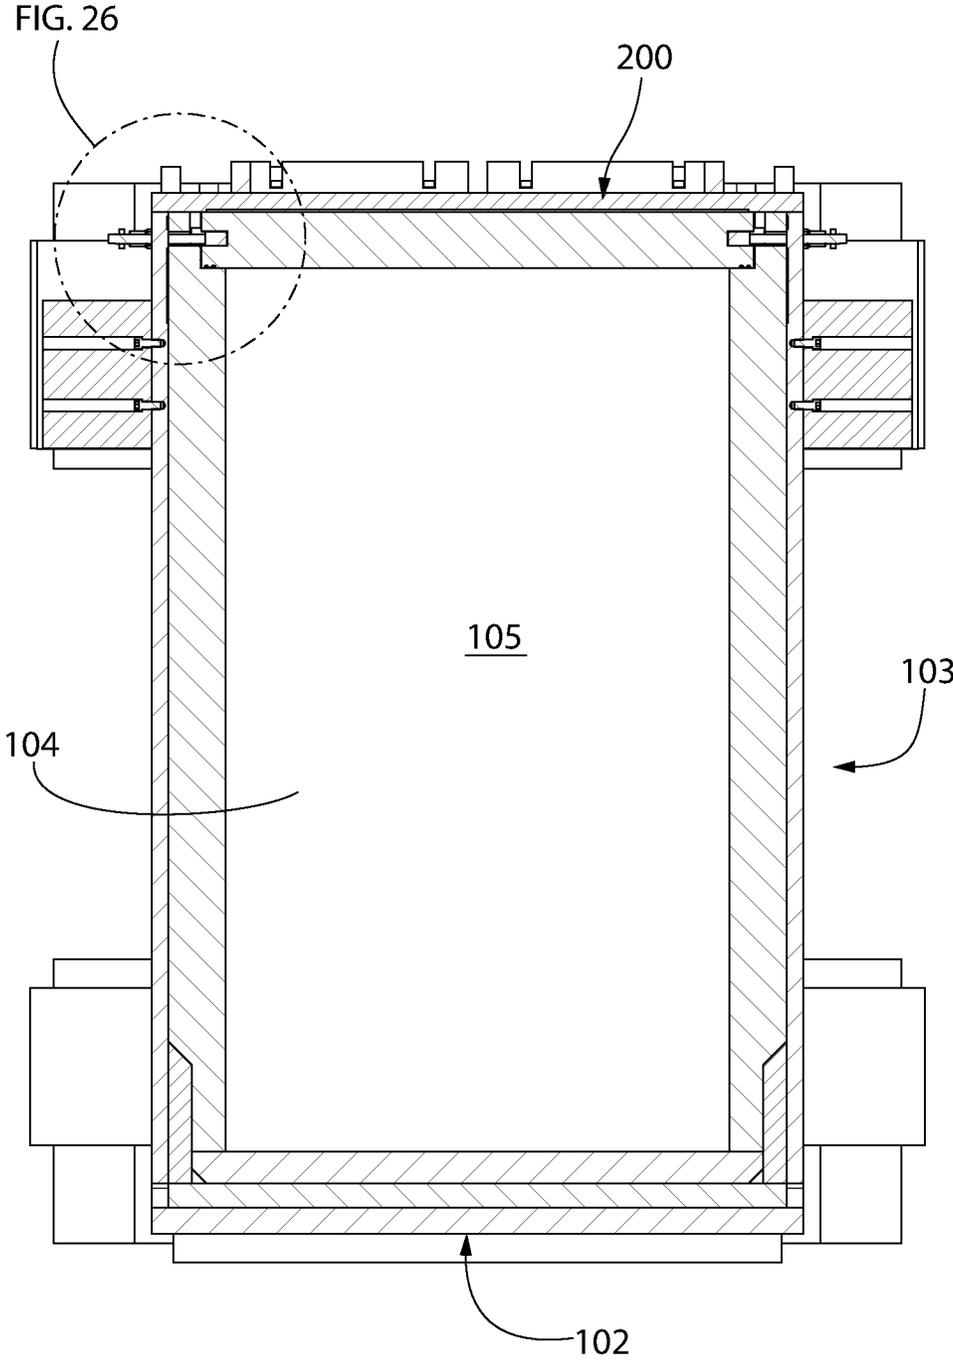


FIG. 25

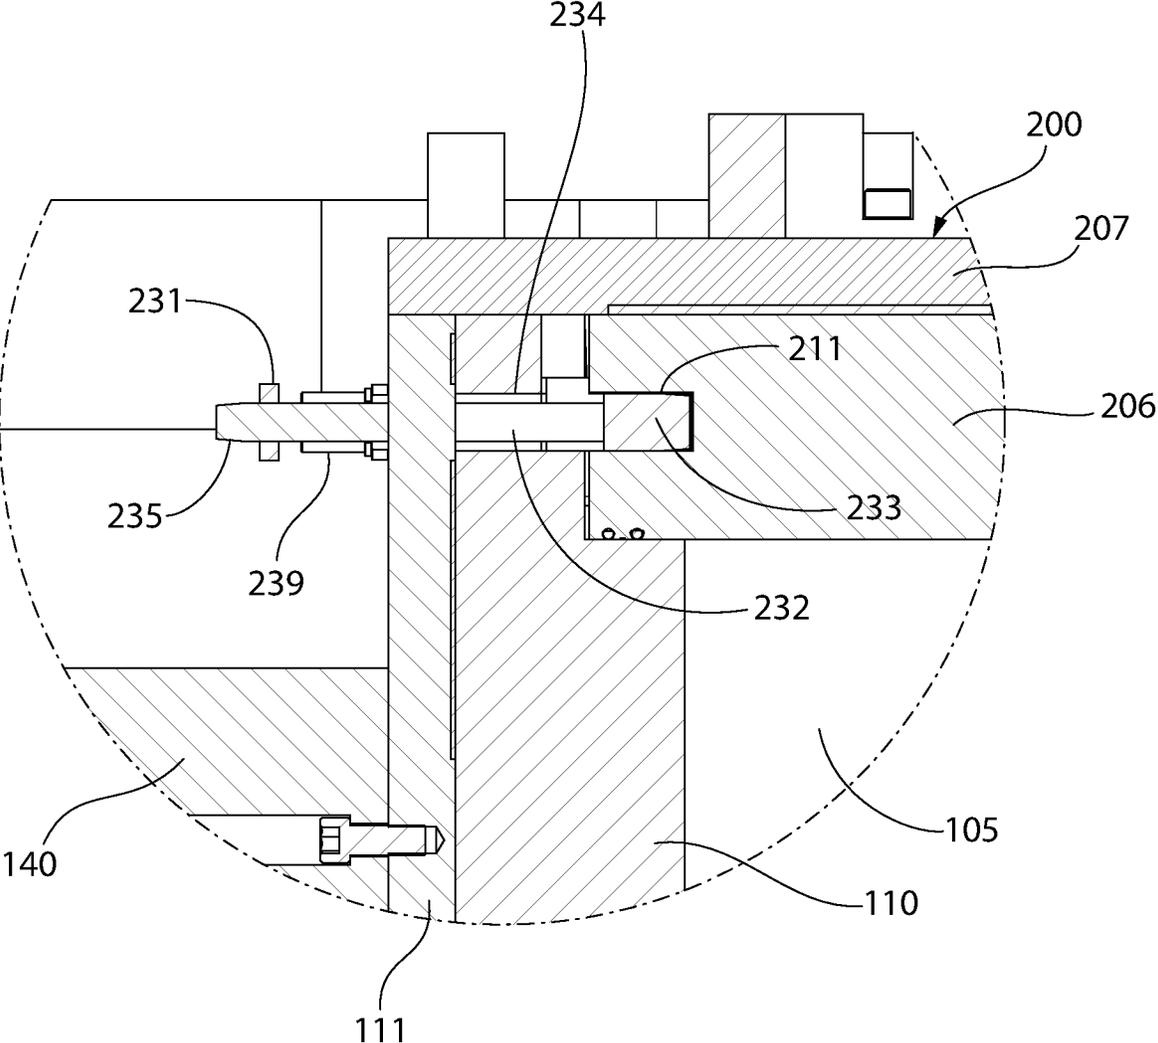


FIG. 26

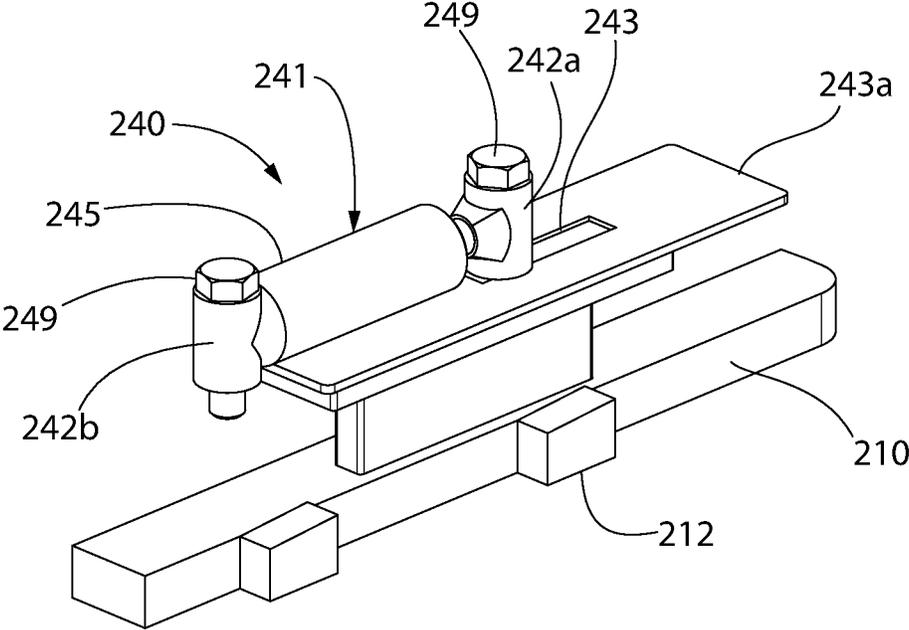


FIG. 27

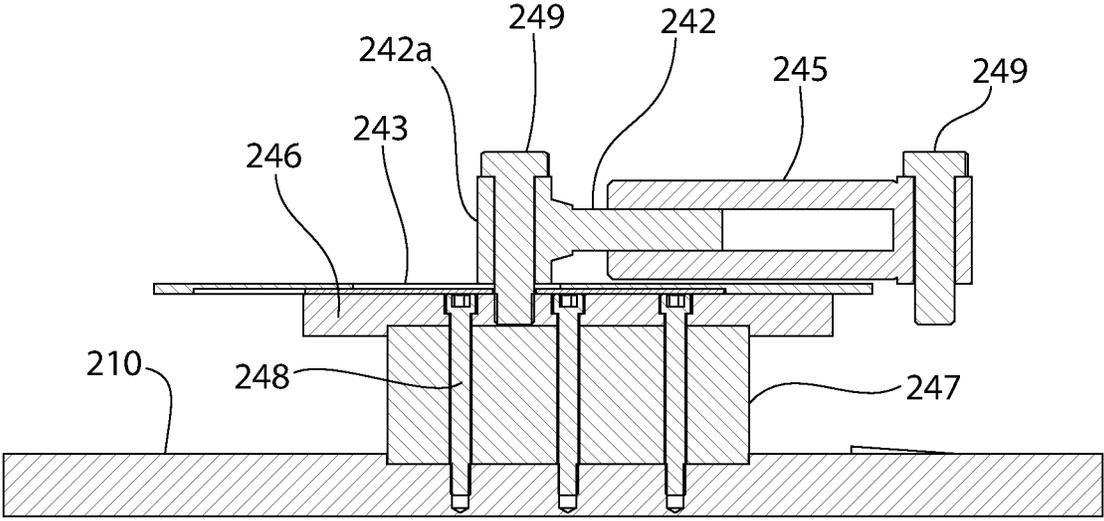


FIG. 28

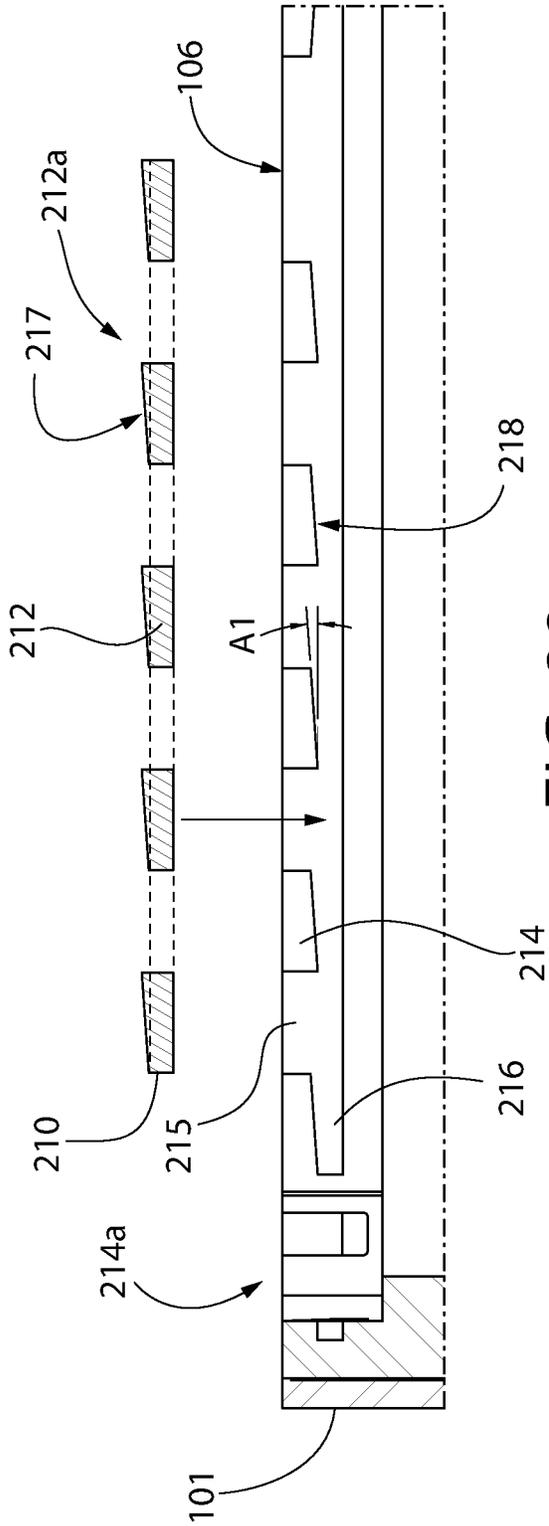


FIG. 29

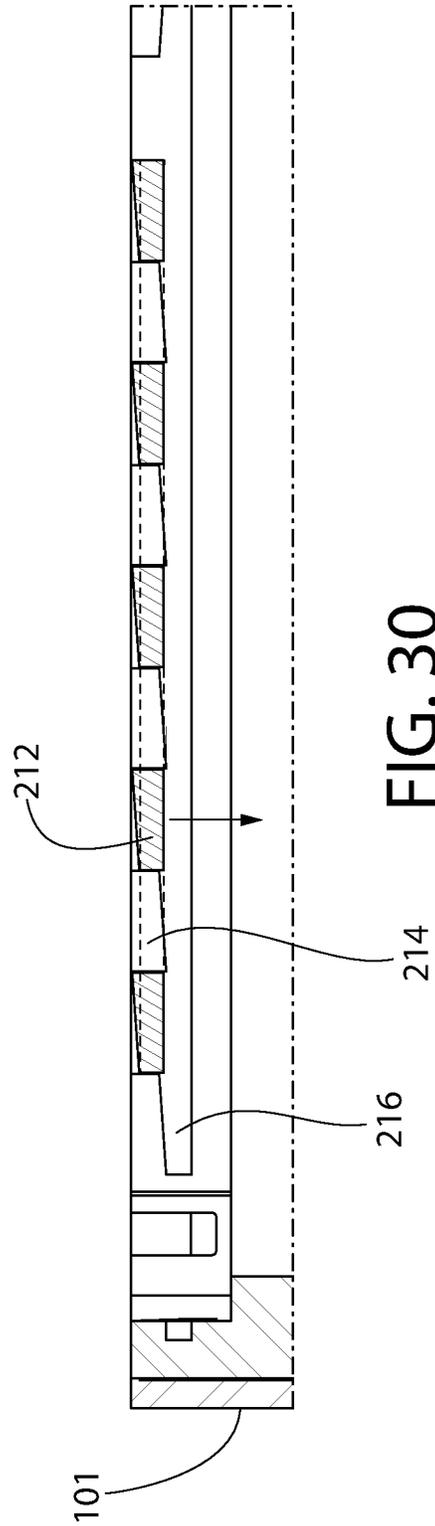


FIG. 30

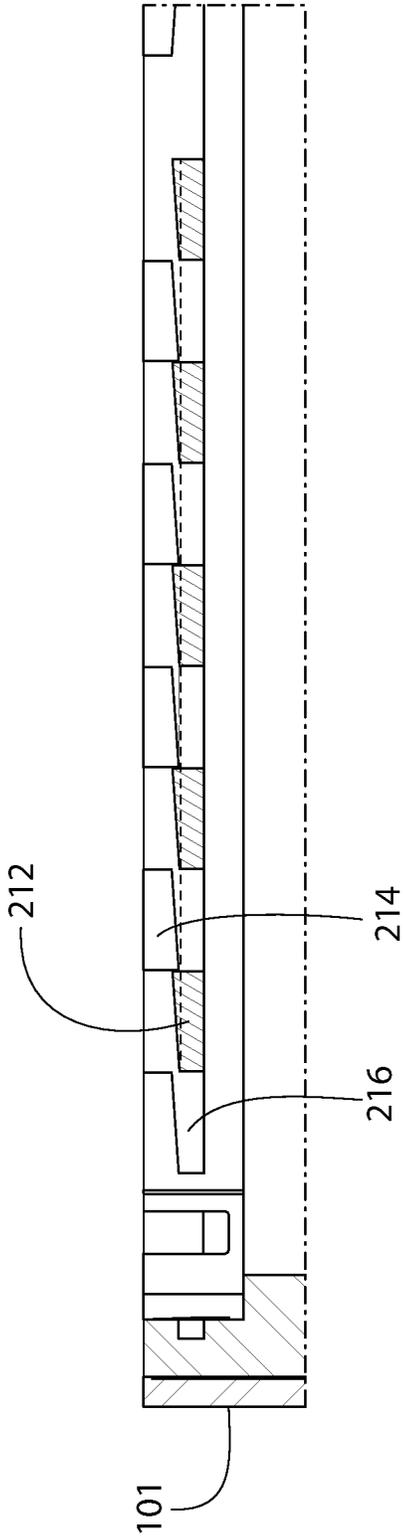


FIG. 31

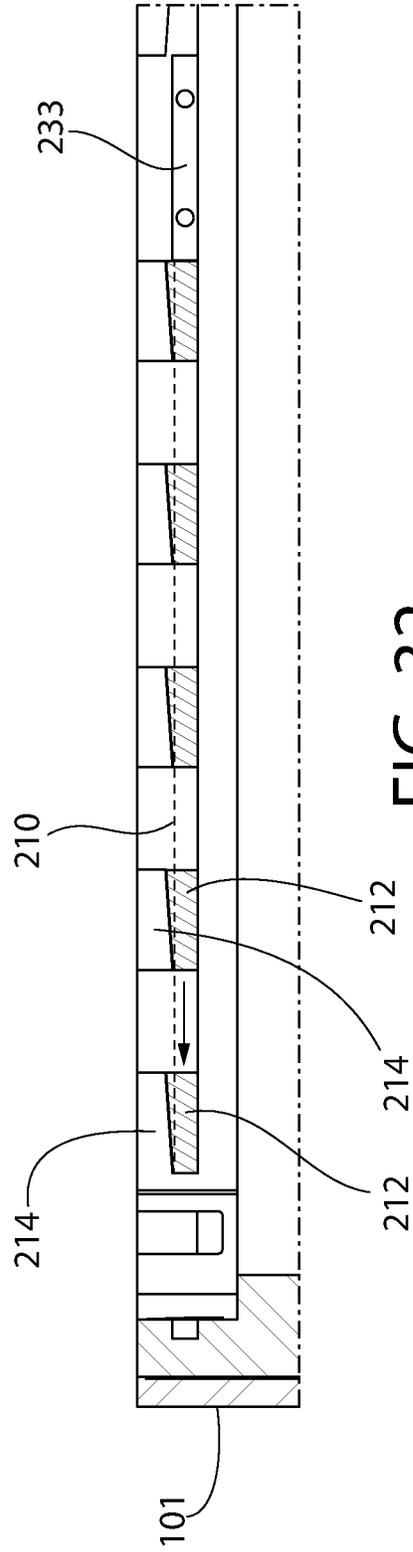


FIG. 32

1

## STORAGE AND TRANSPORT CASK FOR NUCLEAR WASTE

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 17/831,809 filed Jun. 3, 2022, which is a continuation of U.S. patent application Ser. No. 17/181,439 filed Feb. 22, 2021, which claims the benefit of U.S. Provisional Application No. 62/979,640 filed Feb. 21, 2020; which are all incorporated herein by reference in their entireties.

### BACKGROUND

The present invention relates generally to systems and vessels for transporting and storing high level radioactive nuclear waste materials, and more particularly to a box-type cask in one embodiment for transport and storage of radioactive nuclear waste materials.

The overpacks or casks used to store neutron activated metal and other radiated non-fissile high level radioactive waste, such as that resulting from operation nuclear power generation plants or other type facilities, is typically an open-top cylindrical structure with a bolted circular lid. Such a cask is inefficient to load all types of nuclear waste materials not limited to spent nuclear fuel into the cask. The radiation waste materials are often too large and/or may be irregular shaped for insertion through the narrow top access opening in such cylindrical casks which leads to the internal storage cavity. Further, the act of tightening the bolts once the cylindrical cask is packed with nuclear waste materials is a time consuming which exposes the workers to radiation dosage in proportion to the time needed to complete the tedious installation of the closure bolts.

Accordingly, there remains a need for an improved nuclear waste storage cask that can accommodate a wide variety of waste materials, and which can further be closed and sealed in an expedient manner to reduce radiation exposure of operating personnel handling the cask.

### BRIEF SUMMARY

The present application provides a nuclear waste storage system comprising a radiation-shielded nuclear waste storage cask which overcomes the shortcomings of the foregoing cylindrical type storage casks described above for storing a wide variety of different nuclear waste materials. In one embodiment, a longitudinally elongated box-type cask is disclosed comprising an essentially rectangular body with rectilinear cross sectional internal storage cavity configured for holding nuclear waste material, and a matching rectangular closure lid. The elongated large top opening leading into the storage cavity extends for a majority of the longitudinal length of the cask. In contrast to the small circular opening at the top of cylindrical casks, the present rectangular opening allows large and irregular shaped radioactive metal pieces of waste material to be loaded inside the cask storage cavity in an efficient and expedient manner without undue handling by operating personnel, thereby reducing potential radiation dosage.

In one embodiment, the closure lid be coupled and sealed to the cask body to close the top opening through a quick connect-disconnect joint that does not utilize any threaded fasteners. Instead, a slider locking mechanism comprising mechanically interlocking protrusions provided on periph-

2

eral portions of each of the lid and correspondingly cask body around the cask top opening is employed. While the lid remains stationary on the cask body, the locking protrusions on the lid are slideably relative to the locking protrusions on the cask body between locked and unlocked positions or states. The locking protrusions may be arrayed and spaced apart perimetrically around the lid and cask body. The locking protrusions may be wedge-shaped in one embodiment to produce a wedging-action when mutually engaged which effectively locks the lid to the cask body and seals the nuclear waste contents inside the cask. A gasket at the lid to cask body interface is compressed by the wedging-action to form a gas-tight seal of the cask storage cavity which completes the containment barrier. There is no exchange of air between the ambient environment and the storage cavity in one embodiment.

The term “nuclear waste material” as used herein shall be broadly construed to mean any type or form of radioactive waste material which has been irradiated by a source of radiation. Such irradiation may occur in a nuclear power generation plant with nuclear reactor, or other types of facilities. As one non-limiting example, the radioactive nuclear waste materials may be associated with decommissioning or repair/maintenance of a nuclear facility, and may therefore include a wide variety of sizes and shapes of pieces of equipment (including parts of the reactor), structural components/members, parts, debris, scrap, or similar which have been irradiated and generate radiation.

In one aspect, a cask for containing radioactive materials comprises: a cask body comprising an opening forming a passageway into an internal storage cavity of the cask; a closure lid configured to be detachably coupled to the cask body to enclose the opening; and a locking mechanism comprising at least one first locking member and at least one second locking member, the first and second locking members slideable relative to one another to alter the locking mechanism between: (1) a first state in which the closure lid can be removed from the cask body; and (2) a second state in which the first and second locking members engage one another to prevent the closure lid from being removed from the cask body.

According to another aspect, a cask for containing radioactive materials comprises: a longitudinal axis; an axially elongated cask body defining a top opening forming an entrance to an internal storage cavity of non-cylindrical cross-sectional configuration, the cavity configured for holding radioactive waste materials; and a closure lid detachably coupled to the cask body at the top opening.

According to another aspect, a method for locking a radioactive waste storage cask comprises: positioning a closure lid on a cask body over an opening leading into an internal storage cavity; inserting a peripheral array of first locking protrusions on the lid between and through a peripheral array of second locking protrusions disposed on the cask body around the opening; slideably moving the first locking protrusions beneath the second locking protrusions; and frictionally engaging the first locking protrusions with the second locking protrusions; wherein the lid cannot be removed from the cask body.

Further areas of applicability of the present invention will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples, while indicating the preferred embodiment of the invention, are intended for purposes of illustration only and are not intended to limit the scope of the invention.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully understood from the detailed description and the accompanying drawings, wherein like elements are labeled similarly and in which:

FIG. 1 is top perspective view of a polygonal cask configured for storage of nuclear waste materials according to one embodiment of the present disclosure;

FIG. 2 is an enlarged detail taken from FIG. 1;

FIG. 3 is a bottom perspective view of the cask of FIG. 1;

FIG. 4 is an exploded top perspective view thereof showing the lid removed;

FIG. 5 is an exploded bottom perspective view thereof;

FIG. 6 is a longitudinal side elevation view thereof;

FIG. 7 is a lateral end elevation view thereof;

FIG. 8 is a top plan view thereof;

FIG. 9 is a bottom plan view thereof;

FIG. 10 is a longitudinal transverse cross-sectional view thereof;

FIG. 11 is an enlarged detail taken from FIG. 10;

FIG. 12 is a top perspective view of the closure lid;

FIG. 13 is an enlarged top perspective view of an end portion of the lid;

FIG. 14 is a bottom perspective view of the lid;

FIG. 15A is a top exploded perspective view of the lid;

FIG. 15B is an enlarged detail taken from FIG. 15A;

FIG. 16 is a bottom exploded perspective view of the lid;

FIG. 17A is a partial longitudinal cross sectional view of the lid showing the cask locking mechanism in a locked position or state;

FIG. 17B is a partial longitudinal cross sectional view of the lid showing the cask locking mechanism in an unlocked position or state;

FIG. 18 is an enlarged detail in perspective view of a portion of the cask interior at the top opening showing the cask body locking protrusion arrangement;

FIG. 19 is an exploded perspective view of a portion of a longitudinal sidewall of the cask body showing a locking handle assembly in exploded view as well;

FIG. 20 is an enlarged perspective view of the locking handle assembly in the inward blocking position locked with a cable-lock security tag/seal in place;

FIG. 21 is a second enlarged perspective view of the locking handle assembly in the outward non-blocking position on the cask body;

FIG. 22 is an enlarged detail in perspective view of a portion of the cask interior at the top opening in a corner region showing the cask body locking protrusion arrangement on adjoining walls of cask body;

FIG. 23 is a transverse cross sectional view of the cask body and lid showing the lid removed;

FIG. 24 is an enlarged detail taken from FIG. 23 showing the locking handle assemblies on the longitudinal sidewalls of the cask body in the outward non-blocking position;

FIG. 25 is a transverse cross sectional view of the cask body and lid showing the lid in position on the cask body;

FIG. 26 is an enlarged detail taken from FIG. 25 showing the locking handle assemblies in the inward blocking position;

FIG. 27 is a perspective view of an actuator assembly for moving locking bars of the lid;

FIG. 28 is a cross sectional view thereof;

FIG. 29 is a first schematic diagram of a sequential method for locking the cask of FIG. 1;

FIG. 30 is a second schematic diagram thereof;

FIG. 31 is a third schematic diagram thereof; and

FIG. 32 is a fourth schematic diagram thereof.

All drawings are schematic and not necessarily to scale. Features shown numbered in certain figures which may appear un-numbered in other figures are the same features unless noted otherwise herein. A general reference herein to a figure by a whole number which includes related figures sharing the same whole number but with different alphabetical suffixes shall be construed as a reference to all of those figures unless expressly noted otherwise.

## DETAILED DESCRIPTION

The features and benefits of the invention are illustrated and described herein by reference to non-limiting exemplary (“example”) embodiments. This description of exemplary embodiments is intended to be read in connection with the accompanying drawings, which are to be considered part of the entire written description. Accordingly, the disclosure expressly should not be limited to such exemplary embodiments illustrating some possible non-limiting combination of features that may exist alone or in other combinations of features.

In the description of embodiments disclosed herein, any reference to direction or orientation is merely intended for convenience of description and is not intended in any way to limit the scope of the present invention. Relative terms such as “lower,” “upper,” “horizontal,” “vertical,” “above,” “below,” “up,” “down,” “top” and “bottom” as well as derivatives thereof (e.g., “horizontally,” “downwardly,” “upwardly,” etc.) should be construed to refer to the orientation as then described or as shown in the drawing under discussion. These relative terms are for convenience of description only and do not require that the apparatus be constructed or operated in a particular orientation. Terms such as “attached,” “affixed,” “connected,” “coupled,” “interconnected,” and similar refer to a relationship wherein structures are secured or attached to one another either directly or indirectly through intervening structures, as well as both movable or rigid attachments or relationships, unless expressly described otherwise.

As used throughout, any ranges disclosed herein are used as shorthand for describing each and every value that is within the range. Any value within the range can be selected as the terminus of the range. In addition, any references cited herein are hereby incorporated by reference in their entireties. In the event of a conflict in a definition in the present disclosure and that of a cited reference, the present disclosure controls.

The terms “seal weld or welding” as may be used herein shall be construed according to its conventional meaning in the art to be a continuous weld which forms a gas-tight hermetically sealed joint between the parts joined by the weld. The term “sealed” as may be used herein shall be construed to mean a gas-tight hermetic seal.

FIGS. 1-28 show various aspects of the nuclear waste transport and storage system. The system includes nuclear waste transfer and storage cask 100 (hereafter nuclear waste cask for brevity) which is usable transport and/or store high level nuclear waste materials. Cask 100 comprises an elongated rectilinear-shaped cask body 101 defining a longitudinal axis LA and the lower part of the containment barrier for the nuclear waste. The body 101 may have a rectangular cuboid configuration in one embodiment (as shown) comprising an axially elongated bottom wall 102, a parallel pair of longitudinal sidewalls 103 attached to the bottom wall, and a pair of lateral end walls 104 attached to opposite ends of the bottom wall between the sidewalls. The longitudinal

5

sidewalls are attached to the longitudinal sides or edges of the bottom wall. End walls **104** are oriented transversely and perpendicularly to longitudinal axis LA and longitudinal sidewalls **103**, and the longitudinal sidewalls are oriented parallel to the axis to form the box-like structure shown. In one embodiment, the sidewalls and end walls may be welded to each other and in turn to the bottom wall to form a weldment. Four corners **107** are formed at the intersection of the sidewalls **103** and end walls **104** which extend vertically along the height of the cask body **101**.

Bottom wall **102** has a flat top surface **102a** and parallel opposing flat bottom surface **102b**. The bottom wall is configured to be seated on a horizontal support surface such as a concrete pad. The interior and exterior surfaces of each of the longitudinal sidewalls **103** and end walls **104** may be generally flat and parallel to each other as well.

Cask **100** may be used in horizontal position as shown when transporting and storing nuclear waste. In this case, the vertical direction is defined for convenience of reference as being transverse and perpendicular to the longitudinal axis LA. A lateral direction is defined for convenience of reference in the horizontal direction as being transverse and perpendicular to the longitudinal axis.

The bottom wall **102**, longitudinal sidewalls **103**, and end walls **104** collectively define an internal storage cavity **105** configured for storing nuclear waste materials previously described herein. The bottom wall, longitudinal sidewalls, and end walls define and circumscribe an axially elongated top opening **106** forming an entrance to the cavity for loading nuclear waste materials therein. The longitudinally-extending top opening **106** extends for a substantial majority of the entire length of the cask body (less the thicknesses of the sidewalls and end walls). This provides a large opening which facilitates loading many different shapes and sizes nuclear waste materials into the cask **100**.

Longitudinal sidewalls **103** and lateral end walls **104** of the cask may each have a composite construction comprising a metallic inner containment plate **110** adjacent to the storage cavity **105** and a metallic outer radiation dose blocker plate **111** abutted thereto. Bottom wall **102** may similarly have a composite construction comprising a metallic inner containment plate **112** adjacent to the storage cavity and a metallic outer radiation dose blocker plate **113**. In some embodiments, as shown, an intermediate dose blocker plate **114** may be sandwiched between the inner containment plate and outer dose blocker plate when needed to provide additional radiation shielding. In some non-limiting embodiments, the containment plates may be formed of steel alloy and the radiation dose blocker plates may be formed of a different steel material such as for example stainless steel for protection against corrosion by the exterior ambient environment. A suitable thickness of the containment and blocker plates may be used as needed to effectively reduce the radiation emitted from the cask to within regulatory compliant exterior levels for containment casks. As noted, the bottom wall and walls of cask **100** may have an all metal construction without use of concrete. However, in other possible embodiments, concrete and additional or other radiation shielding materials including boron-containing materials for neutron attenuation and various combinations thereof may be provided if additional radiation blocking is needed. The bottom wall and wall construction materials used therefore do not limit the invention.

With continuing reference to FIGS. 1-28, cask **100** further includes a longitudinally elongated closure lid **200** which forms the upper containment barrier. Lid **200** may be of rectangular shape in one embodiment to match the rectan-

6

gular cuboid configuration of the cask body **101** shown. Lid **200** has a length and width sufficient to form a complete closure of the top opening of the cask in order to fully enclose and seal the internal storage cavity **105** of the cask and nuclear waste materials. Lid **200** includes an outward facing top surface **201** and parallel bottom surface **202** facing cavity **105** of the cask body **101** when positioned thereon, parallel longitudinal sides **203** (i.e., long sides of the lid), parallel lateral ends **204** (i.e., short sides of the lid) extending between the longitudinal sides, and corners **205** (four as shown) at the intersection of the longitudinal sides and lateral ends. Top and bottom surfaces **201**, **202** are the major surfaces of the lid having a greater surface area than other surfaces on the lid.

Referring additionally to FIGS. 10-17B, closure lid **200** may have a composite construction comprising a metallic inner containment plate **206** at bottom located adjacent to the storage cavity **105** when the lid is position on the cask body **101**, and a top metallic outer radiation dose blocker plate **207**. Containment plate **206** defines bottom surface **202** of the lid and blocker plate **207** defines top surface **201**. An insulation board **208** may be sandwiched between plates **206** and **207** for protection against fire event.

In one embodiment, a peripheral lid spacer frame **209** may be attached to the bottom containment plate **206** of lid **200**. Frame **209** has an open space-frame structure which extends perimetrically around the bottom surface **202** of the lid. The frame **209** may include an X-brace **209a** extending through the interior space defined by the peripheral linear members of the frame to add structural reinforcement and bracing. When lid **200** is positioned on cask body **101**, inner containment plate **206** and frame **209** are received completely into storage cavity **105** of the cask (see, e.g., FIGS. 10 and 11).

A compressible gasket **220** may be disposed on the bottom surface **202** of the lid **200** to form a gas-tight seal at the interface between the lid and cask body. Gasket **220** has a continuous perimetrically extending shape which is complementary configured dimensionally to conform to and circumscribed the top end of the cask body **101** on all sides. Gasket **220** therefore extends perimetrically along the tops of the longitudinal sidewalls **103** and lateral end walls **104** of the cask to form an effective seal. Gasket **220** may be formed of any suitable compressible material, such as elastomeric materials in some embodiments.

According to one aspect of the disclosure, a bolt-free cask locking mechanism provided to lock and seal lid **200** to cask body **101**. FIGS. 10-18 and 22-28 in particular show various aspects of the bolt-free cask locking mechanism, which will now be further described in detail.

Lid **200** and cask body **101** include a plurality of locking features which cooperate to form the locking mechanism. The cask locking mechanism may comprise a plurality of first locking protrusions **212** spaced apart on the lid which are selectively and mechanically interlockable with a plurality of second locking protrusions **214** spaced apart on the cask body to lock the lid to the cask body. First locking protrusions **212** are movable relative to the lid and cask body **101**, whereas second locking protrusions **214** are fixed in position on and stationary with respect to the cask body.

The locking features of the lid **200** comprises at least one first locking member **212a**, which may be in the form of a linearly elongated locking bar **210** for locking the lid to the cask body (see, e.g., FIGS. 15B and 29-32). In one embodiment, a plurality of elongated locking bars **210** are arranged perimetrically around the outer peripheral portions of the lid on longitudinal sides **203** and lateral ends **204**. First locking

protrusions **212** are formed on and may be an integral unitary structural part of the locking bars in one embodiment being formed of single monolithic piece of cast or forged metal. In other possible less preferred but satisfactory embodiments, locking protrusions **212** may be discrete elements separately attached to the locking bars **210** via mechanical fasteners or welding.

Locking bars **210** are slideably disposed in corresponding outward facing elongated linear guide channels **211** formed in the longitudinal sides and lateral ends of the lid **200**. The locking bars are movable back and forth in opposing directions within the guide channels relative to the lid. Each locking bar **210** includes a plurality of the first locking protrusions **212** which project outwardly from the bar beyond the outward facing surfaces of the longitudinal sides **203** and lateral ends **204** of the lid. The linear array of locking protrusions **212** are spaced apart to form openings **213** between adjacent locking protrusions for passing the second locking protrusions **214** on the cask body **101** therethrough, as further described herein.

The longitudinal sides **203** and lateral ends **204** of the lid **200** may each include at least one locking bar **210**. In one preferred but non-limiting embodiment, as illustrated, the lateral ends **204** of the lid may include a pair of the locking bars **210** and the longitudinal sides **203** of the lid may similarly include a pair of locking bars. This forms a unique arrangement and interaction between the locking bars to maintain a locked position, as further described herein.

The corresponding locking features of the bolt-free cask locking mechanism on cask body **101** include at least one second locking member **214a** comprising the second locking protrusions **214**. Locking member **214a** may comprise upper portions of cask body **101** in which the second locking protrusions **214** and related features such as locking slot **216** described below are integrally formed with the cask body inside storage cavity **105**. Locking protrusions **214** are fixedly disposed in linear arrays on the cask body adjacent to top ends of the longitudinal sidewalls **103** and lateral end walls **104** of the body and cask body top opening **106**. The second locking protrusions **214** are therefore stationary and not movable relative to the cask body. The second locking protrusions **214** project inwardly into the nuclear waste storage cavity **105** from the interior surfaces of the longitudinal sidewalls **103** and lateral end walls **104** of the cask body. Second locking protrusions **214** therefore are arranged around the entire perimeter of the cask body to interface with the first locking protrusions **212** of lid **200**.

The linear array of second locking protrusions **214** are spaced apart to form openings **215** between adjacent locking protrusions for passing the first locking protrusions **212** on the lid therethrough. A linearly elongated locking slot **216** is formed and recessed into the cask body **101** immediately below the second locking protrusions **214** on each of the longitudinal sidewalls **103** and end walls **104** of the cask body. The locking slots **216** form continuous and uninterrupted inwardly open structures having a length which extends beneath at least all of the second locking protrusions on each of the longitudinal sidewalls **103** and lateral end walls **104** of the cask body as shown. Locking slots **216** therefore extend for a majority of the lengths/widths of the cask body longitudinal sidewalls and end walls. Locking slots **216** are in communication with the openings **215** between the second locking protrusions **214** to form an insertion pathway for the first locking protrusions **212** of lid **200** to enter the locking slots.

In one preferred but non-limiting construction, the openings **215** between the second locking protrusions **214** and the

elongated locking slots **216** may be formed as recesses machined into the cask body **101** by removing material from longitudinal sidewalls **103** and lateral end walls **104**. The material remaining therefore leaves the second locking protrusions **214** in relief. Second locking protrusions **214** therefore in this case are formed as integral unitary and monolithic parts of the cask body material. In other possible constructions, however, the second locking protrusions **214** may be separate structures which are welded or otherwise fixedly attached to the cask body **101**. In this latter possible construction, no locking slot **216** is formed but the cask locking mechanism may nonetheless still function satisfactorily to lock the lid to the cask body. In yet other possible constructions, the second locking protrusions **214** and locking slots **216** may be formed on linearly elongated closure bars of metal having the same composite construction as the longitudinal sidewalls **103** and end walls **104** previously described herein. The closure bars are in turn welded onto the tops of each longitudinal sidewalls and end walls to produce the same structure in the end as illustrated herein.

With continuing reference to FIGS. **10-18** and **22-28**, the first and second locking protrusions **212**, **214** may be generally block-shaped structures having a rectangular configuration. In one preferred but non-limiting embodiment, the first and second locking protrusions may each be wedge-shaped defining locking wedges having at least one tapered locking surface **217** or **218**. The locking protrusions may be configured and arranged such that the tapered locking surfaces **217** of the first locking protrusions **212** on lid **200** are each slideably engageable with one of the tapered locking surfaces **218** of a corresponding second locking protrusion **214** of the cask body **101**. In one embodiment, the tapered locking surfaces **217** of the first locking protrusions **212** on lid **200** may be formed on a top surface thereof, and the tapered locking surfaces **218** of the second locking protrusions **214** on cask body **101** may be formed on a bottom surface thereof. When the first and second locking protrusions are engaged to lock the lid to the cask body, the tapered locking surfaces **217**, **218** become slideably engaged forming a generally flat-to-flat interface therebetween. This creates a wedging-action which draws the lid **200** towards against the cask body **101** to fully compress the gasket **220** therebetween which forms a gas-tight seal of the cask internal storage cavity **105** and its nuclear waste material content.

The tapered locking surfaces **217** and **218** preferably have the same taper angle **A1** (see, e.g., FIG. **29**) to form the generally flat-to-flat interface therebetween when mutually and frictionally engaged via the wedging action. Any suitable taper angle **A1** may be used. In one representative but non-limiting examples, the taper angle **A1** preferably may be between about 2 and 20 degrees. Other tapered angles may be used where appropriate.

The locking bars **210** with first locking protrusions **212** on lid **200** thereon are slideably movable between a locked position or state (see, e.g. FIG. **17A**) in which the first and second protrusions **212**, **214** are mutually engaged to prevent removal of the lid **200** from the cask body **101** (see, e.g. FIG. **11**), and an unlocked position or state (see, e.g. FIG. **17B**) in which the first and second protrusions are disengaged to allow removal of the lid from the cask body in a vertical direction transverse to longitudinal axis **LA** of the cask.

To move the locking bars **210** with sufficient applied force to frictionally interlock the first and second locking protrusions **212**, **214**, and to concomitantly minimize radiation dosage to operating personnel, a remote lid operating system

may be provided. This system is operably coupled to each of the locking bars **210** and configured to advantageously move the locking bars **210** between the locked and unlocked positions from a remote radiation safe distance and area. This obviates the need for operators to manually operate the locking bars directly at the cask during the lid-to-cask body closure and locking process.

In one embodiment, the remotely-operated lid operating system comprises a local actuator **240** mounted on the top surface **201** of lid **200** for and coupled to each of the locking bars **210**. FIGS. **27** and **28** show actuators **240** in isolation and detail. Each actuator **240** is an assembly which may generally comprise a cylinder-piston assembly **241** including cylinder **245** and an extendible/retractable piston rod **242** slideably received inside the cylinder. The cylinder-piston assembly is fixedly attached to lid **200**. Cylinder **245** may be fixedly mounted to the lid via a bolt **249** passing through a tubular proximal mounting end **242b** as shown. Piston rod **242** has a tubular distal working end **242a** fixedly coupled to the locking bar **210** through an elongated operating slot **243** formed through the lid. The piston rod **242** is therefore moves the locking bar **210** in the manner described herein. In one embodiment, slot **243** may be formed in a lid insert plate **243a** which in turn is mounted to the lid. A threaded bolt **249** may be used to couple the piston rod to the locking bar **210** via an intermediate block assembly comprising an upper mounting block **246** and lower mounting block **247**. Upper block **246** may be formed as integral part of lid insert plate **243a** in some embodiments. Piston rod **242** is fixedly bolted to upper mounting block **246**. Upper mounting block **246** is fixedly mounted to lower mounting block **247** via a plurality of threaded fasteners **248** which extend through the upper mounting block and are threadably engaged with the locking bar **210** (see, e.g., FIG. **28**). The mounting block assembly provides a robust coupling of the piston rods **242** to the locking bars **210** which can withstand the shear forces generated when the cylinder-piston assemblies **241** are actuated to drive the locking protrusions **212**, **214** of the lid **200** and cask body **101** into locking engagement.

The cylinder-piston assembly **241** may be either (1) hydraulically operated wherein the working fluid is oil, or (2) pneumatically operated wherein the working fluid is compressed air. Oil or air hoses are fluidly coupled to the cylinder-piston assemblies (not shown) and operated from a remote hydraulic or pneumatic control unit in a conventional manner which comprises an air compressor or hydraulic pump with appropriate valving depending on the type of system provided. When actuated, the locking bar actuators **240** function to slide the locking bars **210** between the locked and unlocked positions (FIGS. **17A** and **17B**) via extending or retracting the piston rod **242**. It bears noting that the use of hydraulic or pneumatic means to move the locking bars **210** applies a greater force to the locking bars to form tight locking engagement via the wedging-action between the first and second locking protrusions of the lid and cask body than could be provided by manually actuating the locking bars **210**. This advantage, coupled with avoiding exposure of operating personnel or workers to radiation dosage are notable benefits of the present remote lid operating system.

Interaction between the locking protrusions **212**, **214** and a related process/method for locking the nuclear waste cask **100** (i.e., lid **200** to cask body **101**) are described farther below. The movement and functioning of the locking bars **210**, however, is first further described.

FIGS. **17A** and **17B** show the locked and unlocked positions of the locking bars **210** on lid **200**. Retention

features are provided as a safety mechanism which lock and retain the locking bars in the locked position to prevent the lid **200** from being unintentionally unlocked from the cask body **101**, such as could potentially result from substantial force impacts occurring during transporting and handling the cask (e.g., lifting, lowering, or loading the cask onto a transport vehicle/vessel), or during a regulatory postulated cask drop event.

In one embodiment, the locking bars **210** on the longitudinal sides **203** of lid **200** are moveable towards each other to form the unlocked position shown, and away from each other to form the locked position shown. Conversely, the locking bars **210** on the lateral ends **204** of the lid are moveable towards each other to form the locked position, and away from each other to form the unlocked position. This apparent dichotomy serves a purpose. When locking bars **210** on the lateral ends **204** of the lid are therefore positioned and abutted together in the locked position, terminal end portions **210a** of the locking bars on the longitudinal sides **203** of the lid are positioned to overlap and engage/block the locking bars on the lateral ends **204** of the lid from being moved apart to the unlocked position (see, e.g., FIG. **17A**). This forms a first locking bar retention feature which locks the lid lateral end locking bars **210** in the locked position.

The second locking bar retention feature acts on the locking bars **210** on the longitudinal sides **203** of the lid **200** to lock the lid longitudinal side locking bars in the locked position. This retention feature comprises a locking handle assembly **230** slideably mounted on each of the longitudinal sidewalls **103** of the cask body **101** (see, e.g., FIGS. **17A-B**, **19-21**, and **23-26**). Each locking handle assembly **230** includes an elongated proximal handle **231** configured for receiving an applied force generated by a user such as via grasping or a tool, a distal elongated locking block **233**, and a securement bar **235**. The locking block **233** is coupled to the handle **231** by one or more elongated coupling rods **232** of any suitable polygonal or non-polygonal cross-sectional shape. Preferably a pair of coupling rods **232** are provided. Securement bar **235** is fixedly attached to the exterior surface of the cask body longitudinal sidewalls **103** (e.g., welded) and has a proximal end **235a** which is insertable through an aperture **236** in the handle **231**. End **235a** may project through aperture **236** when the handle assembly is fully inward and can be secured in place (e.g., FIG. **20** further described herein).

The locking handle assemblies **230** are positioned on each longitudinal sidewall **103** of the cask body **101** to allow the locking block **233** to be manually and selectively moved into and out of the locking slots **216** on the cask body sidewalls. A windows **234** formed in each longitudinal sidewall **103** allows the locking block **233** to access the guide channels **216**. More particularly, window **234** is formed in and extends completely through inner containment plate **110** of the longitudinal sidewalls **103** of the cask body. Locking block **233** is completely retractable from locking slot **216** into the containment plate **110** to allow insertion of first locking protrusions **212** on locking bars **210** into and slideably moved along the locking slot **216** beneath second locking protrusions **214** of the cask body. The outer radiation dose blocker plate **111** comprises a pair of holes **237** to permit the two coupling rods **232** to be coupled to locking block **233** located inside the blocker plate in window **234** of the inner containment plate **110** (see, e.g., FIG. **18**). A pair of cylindrical mounting flange units **239** may be used to fixedly mount each locking handle assembly **230** to the dose blocker plate **111** on the longitudinal sidewalls **103** of cask

## 11

body **101** (see, e.g., FIG. **20**). Flange units **239** may be bolted/screwed or welded to the outer blocker plate **111**. The flange units **239** further act as standoffs to limit the maximum inward projection of the locking block **233** into the locking slot **216** of the cask body. The coupling rods **232** are slideably inward/outward through the flange units to change position of the locking handle assemblies **230**.

The locking handle assemblies **230** are moveable via handles **231** between (1) an inward blocking position in which the locking blocks **233** project into the locking slots **216** of the cask body **101** beneath the second locking protrusions **214**, and (2) an outward non-blocking position in which the locking blocks **233** are completely retracted from the locking slots. The non-blocking position allows locking bars **210** with first locking protrusions **212** thereon to enter and slide back and forth in the locking slots **216** between the locked and unlocked positions (both previously described herein) when the lid **200** is positioned on cask body **101**. Once the locking bars are in the locked position, a gap **G** is formed between each pair of locking bars on the longitudinal sides **203** of the lid (see, e.g., FIGS. **12** and **17A**). Moving the locking handle assemblies **230** to the inward blocking position locates the locking blocks **233** in and fills the gaps **G** on each longitudinal sidewall **103** of the cask body (within guide channels **211** of lid **200**). The locking bars **210** therefore cannot be drawn back together to their unlocked position, thereby locking the locking bars in the locked position due to interference between the locking blocks **233** and locking bars. To move the locking bars **210** on longitudinal sidewalls **103** to the unlocked position, the locking blocks **233** are first withdrawn via handles **231** of the locking handle assemblies **230** to re-open gap **G**, thereby allowing the longitudinal sidewall locking bars to slide together again to the unlocked position.

When each handle assembly **230** is in the inward blocking position, the securement end **235a** of securement bar **235** is projected through apertures **236** in handles **231**. Any suitable commercially-available cable-lock security tag or seal tag **238** as shown may be coupled through hole **235b** in securement bar **235** to lock the handle assemblies in the inward blocking position. Should the cask **100** be impacted or dropped during handled, the lid **200** will remain locked to the cask body **101** since the handle assemblies **230** cannot be moved outward to unlock the lid. The security tag also provides visual indication that the lid is in the locked position to operating personnel. This is especially helpful in situations where the cask lid **200** may be loaded with radioactive materials and locked to the cask body **101** at one location, and then the cask is transported to a more remote receiving location. The crew at the receiving location can readily confirm the lid is in the locked position or state.

A process or method for locking the nuclear waste storage cask **100** using the foregoing features will now be briefly described. FIGS. **29-32** are sequential views showing the relationship between the first and second locking protrusions **212**, **214** during the lid mounting and cask locking process.

The process or method generally includes first placing the locking bars **210** on longitudinal sidewalls **103** and lateral end walls **104** of lid **200** in their unlocked position and the locking blocks **233** on locking handle assemblies **230** in their non-blocking positions which retracts the locking blocks **233** from the locking slots **216** on the longitudinal sidewalls **103** of the cask body **101** (FIG. **17B**). The locking bar actuators **240** or manual means may be used to perform the foregoing step. The locking bars **210** on longitudinal sides **203** of lid **200** are together, and locking bars on lateral ends **204** of the lid are spaced apart forming gap **G** ther-

## 12

between as shown. The lid is positioned over and align with the cask body **101** wherein the lid first locking protrusions **212** are vertically aligned with the openings **215** between second locking protrusions **214** on the cask body (FIG. **29**).

Next, the closure lid **200** is lowered and positioned on top of the cask body **101** over the top opening **106**. This step first vertically inserts the peripheral array of first locking protrusions **212** on locking bars **201** of lid **200** between the peripheral array of second locking protrusions **214** disposed on the cask body **101** around the top opening (FIG. **30**). As the lid engages the top of the cask body **101**, the first locking protrusions pass completely through the openings **215** between the second locking protrusions **214** and enter the horizontally elongated locking slots **216** in a position below the second locking protrusions (FIG. **31**). In turn, the second locking protrusions **214** pass through openings **213** between the first locking protrusions **212** and become positioned above the first locking protrusions.

The process or method continues with then sliding the locking bars **210** to their locked positions (FIGS. **17A** and **31**), which moves the first locking protrusions **212** beneath the second locking protrusions **214** in a horizontal locking plane oriented parallel to the bottom wall **102** and passing through the locking slots **216**. This step may be performed by actuating the hydraulic or pneumatic cylinder-piston assemblies **241** of the locking bar actuators **240** from a location remote from the cask to minimize radiation exposure of operating personnel. Sliding the locking bars **210** slideably and frictionally engages the first locking protrusions **212** of the lid with bottom surfaces of the second locking protrusions **214** of the cask body **101**. Specifically, the tapered locking surfaces **217**, **218** of the wedge-shaped locking protrusions **212**, **214** become mutually locked in increasingly tightening frictional engagement via the wedging-action produced. This draws lid **200** downward with added force beyond the weight of the lid alone onto and against the cask body **101** to fully compress gasket **220** and seal the cask cavity **105**. The gasket is now compressed further than when the lid **200** first engages the cask body before the cask locking mechanism is actuated to draw the lid farther downward.

Now that the lid **200** is fully coupled to the cask body **101**, the locking handle assemblies **230** may be moved to their inward blocking positions to insert the locking blocks **233** between each pair of locking bars **210** on the longitudinal sides **103** of the lid, thereby preventing sliding and unlocking of the longitudinal side locking bars (FIG. **17A**). The handle assemblies therefore retain the locked positions of the locking bars on the cask longitudinal sidewalls **103**, which in turn retains the locking bars on the cask end walls in the locked position as previously described herein.

It bears noting that although the locking bars **210** with locking protrusions **212** are shown and described herein as being slideably mounted to the lid **200** and locking protrusions **214** are shown and described as being fixedly mounted to the cask body **101** in one embodiment, in other embodiment the arrangement may be reversed. Accordingly, the locking bars **210** may be slideably mounted to guide channels **211** formed in the cask body while the fixed locking protrusions **214** may instead be fixedly mounted to the closure lid. This alternate arrangement provides the same benefits and is operated in the same manner previously described herein. The locking bar hydraulic or pneumatic actuators **240** in turn would be mounted to the cask body for operating the locking bars **210**.

Although the cask locking mechanism with locking bars **210** and locking protrusions **212**, **214** are shown and

13

described herein as being applied to a box-shaped rectangular cuboid cask body and rectangular lid, the locking mechanism may be applied with equal benefit to a conventional cylindrical cask body and circular lid. The fixed second locking protrusions **214** may be arranged on either the cylindrical cask body or lid, and the locking bars **210** may be mounted on the other one of the cask body or lid. The locking bars and guide channels for the cylindrical cask application may be arcuately curved and operated via the hydraulic or pneumatic locking bar actuators **240** previously described herein if mounted on either the cask body or circular lid. Alternatively, both the locking protrusions **212**, **214** may be fixedly mounted to the cylindrical cask body and lid, and the slideable locking bars may be omitted. In this case, the lid may simply be rotated relative to the cylindrical cask body to slideably and frictionally engage the wedge-shaped locking protrusions to form a breech lock type closure. The lid may be rotated via assistance from the hydraulic/pneumatic actuators. Based on the foregoing alternative embodiments of the cask locking mechanism and description already provided herein, it is well within the ambit of those skilled in the art to implement any of these options without undue experimentation.

With general reference to FIGS. 1-10 and 21-23, an impact absorption system is provided to protect the cask **100** and containment barrier from undue damage should the cask be forcibly impacted or dropped during transport and handling. In one embodiment, each of the longitudinal sidewalls **103** and lateral end walls **104** of the cask body **101** comprises a plurality of outwardly protruding impact absorber bars **140** fixedly coupled thereto. The closure lid **200** and bottom surface **102** of the cask body may also include multiple impact absorber bars **140** fixedly coupled thereto. The bars **140** may be each configured and arranged in appropriate locations on and in a pattern appropriate to meet regulatory requirements (e.g., Nuclear Regulator Commission or NRC) for surviving a postulated cask impact/drop event. In one embodiment, the impact absorber bars **140** may be configured as rectangular blocks of suitable thickness and dimension for the intended purpose. The locking handle assemblies **230** on longitudinal sidewalls **103** of cask body **101** may each be protected between at least a pair of absorber bars **140** located proximately to the assembly on each side. These protective impact absorber bars have depth measured perpendicularly to the exterior surface of the cask body longitudinal sidewalls **103** such that the handle assemblies **230** do not protrude outwards beyond the bars. In one embodiment, the impact absorber bars **140** may be bolted to the cask body and lid (see, e.g., FIGS. 23-26). This allows the bars to be readily replaced if damaged during a cask drop/impact event. In other embodiments, the bars **140** may be welded thereto.

Each corner **107** of the cask body **101** and corners **205** of lid **200** may be protected by corner impact absorbers **141** fixedly coupled to corner regions. Sets of upper and lower corner impact absorber are provided to cover and shield the lid and adjacent upper corner regions of the cask body, and the bottom wall **102** and adjacent lower corner regions of the cask body, respectively. In one embodiment, the corner impact absorbers **141** may be assemblies comprising an inner corner bracket **142** and outer corner blocks **143** fixedly coupled thereto. Inner corner brackets **142** may be fixedly coupled to the cask body **101** at the lower corners of the body, and the lid and/or cask body at the upper corners. In one embodiment, the inner corner brackets **142** and corner blocks **143** may be fixedly coupled to and movable with lid **200** as shown herein. The inner corner brackets **142** have

14

inward facing concave recesses configured to conform to the perpendicular and squared off corners of the cask body and lid. The outer corner blocks **143** have concave recesses configured to conform to the exterior shape of the inner corner brackets **142**. The upper corner impact absorbers **141** extend vertically downwards from the lid over the upper corners of the cask body, and horizontally wrap longitudinally and laterally around the side regions of the corners on both the cask body **101** and lid **200**. The upper corner impact absorbers also extend partially over the top of the lid at the corners. The lower corner impact absorbers **141** horizontally wrap longitudinal and laterally around the side regions of the corners on the cask body **101** and bottom wall **102**, and partially underneath the bottom wall. In one embodiment, the inner corner brackets **142** and outer corner blocks **143** may be bolted or screwed together via threaded fasteners. The inner corner brackets **142** may in turn be bolted or screws to the cask body **101** and cask body and/or lid **200** via threaded fasteners as applicable.

To facilitate handling the cask **100**, each of the longitudinal sidewalls **103** of cask body **101** may include a plurality of outwardly protruding lifting trunnions **150** fixedly attached thereto. Lifting trunnions **150** may be generally cylindrical in configuration and of the retractable type in one embodiment which are known in the art. The lid **200** in turn may include a plurality of lifting lugs **151** for handling the lid. Lugs **151** are fixedly attached to the lid. Lifting lugs may be generally cylindrical in configuration in one embodiment. Any suitable number of lifting trunnions and lugs may be provided as needed to safely lift and maneuver the cask body and lid. Other configurations and constructions of the lifting trunnions and lugs may be provided which are suitable for lifting and maneuvering the weight of cask body and lid in a stable manner.

While the foregoing description and drawings represent some example systems, it will be understood that various additions, modifications, and substitutions may be made therein without departing from the spirit and scope and range of equivalents of the accompanying claims. In particular, it will be clear to those skilled in the art that the present invention may be embodied in other forms, structures, arrangements, proportions, sizes, and with other elements, materials, and components, without departing from the spirit or essential characteristics thereof. In addition, numerous variations in the methods/processes described herein may be made. One skilled in the art will further appreciate that the invention may be used with many modifications of structure, arrangement, proportions, sizes, materials, and components and otherwise, used in the practice of the invention, which are particularly adapted to specific environments and operative requirements without departing from the principles of the present invention. The presently disclosed embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being defined by the appended claims and equivalents thereof, and not limited to the foregoing description or embodiments. Rather, the appended claims should be construed broadly, to include other variants and embodiments of the invention, which may be made by those skilled in the art without departing from the scope and range of equivalents of the invention.

What is claimed is:

1. A method for locking a radioactive waste storage cask comprising:
  - positioning a closure lid on a cask body over an opening leading into an internal storage cavity;

15

inserting a peripheral array of first locking protrusions on the lid between and through a peripheral array of second locking protrusions disposed on the cask body around the opening;  
 slideably moving the first locking protrusions beneath the second locking protrusions; and  
 frictionally engaging the first locking protrusions with the second locking protrusions;  
 wherein the lid cannot be removed from the cask body.

2. The method according to claim 1, wherein when the first locking protrusions are arranged in spaced apart groups on a plurality of locking bars slideably mounted on the lid, the locking bars being slideably movable relative to the lid.

3. The method according to claim 2, wherein the slideably moving step comprises sliding each of the locking bars from an unlocked position in which the first locking protrusions do not engage the second locking protrusions, to a locked position in which the first locking protrusions are positioned beneath the second locking protrusions.

4. The method according to claim 1, wherein the frictionally engaging step comprises engaging a tapered locking surface on each of the first locking protrusions with a corresponding tapered locking surface on a respective one of the second locking protrusions which locks the lid to the cask body via a wedging action.

5. The method according to claim 4, wherein engaging the tapered locking surfaces of the first and second locking protrusions draws the lid against the cask body in tightened engagement.

16

6. The method according to claim 5, further comprising compressing a gasket between the lid and the cask body when the lid is drawn against the cask body.

7. The method according to claim 3, wherein the slideably moving step comprises actuating a plurality of hydraulic or pneumatic actuators each coupled to a respective one of the plurality of locking bars which moves the locking bars between the unlocked and locked positions.

8. The method according to claim 7, wherein the actuators are mounted on the lid.

9. The method according to claim 8, wherein each actuator includes an extendible and retractable piston rod fixedly coupled to one of the locking bars.

10. The method according to claim 3, wherein the frictionally engaging step comprises engaging a tapered locking surface on each of the first locking protrusions with a corresponding tapered locking surface on a respective one of the second locking protrusions which locks the lid to the cask body via a wedging action.

11. The method according to claim 10, wherein engaging the tapered locking surfaces of the first and second locking protrusions draws the lid against the cask body in tightened engagement.

12. The method according to claim 5, further comprising compressing a gasket between the lid and the cask body when the lid is drawn against the cask body.

13. The method according to claim 1, wherein the waste storage cask has a horizontally elongated rectangular cuboid configuration.

\* \* \* \* \*